



Shenzhen Global Test Service Co., Ltd

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

TEST REPORT

EN 55032

Electromagnetic compatibility of multimedia equipment - Emission Requirements

EN 55035

Information technology equipment – Immunity characteristics – Limits and methods of measurement

Report Reference No..... : GTS20260120005-1-01

Date of issue..... : Mar. 13, 2026

Testing Laboratory Name..... : **Shenzhen Global Test Service Co., Ltd.**

Address..... : No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

Supervised by

(Testing Engineer)..... : Duke Liu

Duke Liu

Reviewed by

(Testing Engineer)..... : Olive Nie

Olive Nie

Approved by

(Manager)..... : Jason Hu

Jason Hu



Applicant's name..... : **SDAPO Communication Co., Ltd.**

Address..... : 5F, W2, Chengxin Building , Tian An Shen Chuang Valley Industrial Center, Fenggang Town, Dongguan City, Guangdong Province, China

Manufacturer's name..... : **SDAPO Communication Co., Ltd.**

Address..... : 5F, W2, Chengxin Building , Tian An Shen Chuang Valley Industrial Center, Fenggang Town, Dongguan City, Guangdong Province, China

Test specification:

Standard..... : **EN 55032: 2015+A11:2020+A1: 2020**
EN 55035: 2017+A11: 2020
EN IEC 61000-3-2: 2019+A1: 2021+A2:2024
EN 61000-3-3: 2013+A1:2019+A2: 2021

Receiver Date..... : Mar. 04, 2026

Test Period..... : Mar. 04, 2026 ~Mar. 06, 2026

Test item description..... : POE injector

Trade Mark..... : SDAPO

Model/Type reference..... : PSE802G

Listed Models..... : PSE30,PSE801,PSE30G,PSE801G,PSE30TG,PSE30WG-B,
PSE60G,PSE156G,PSE60G-BT,PSE90G,PSE60BT-10G,
PSE60BT-2.5G,PSE90BT-10G,PSE90BT-2.5G,POE-4805L,
PSE24-30TG,PSE60C,PSE30C,PSE90C

Ratings..... : Input:100-240V~50/60Hz
Output:DC 48V-56V, 30W Max

Result..... : **PASS**

Shenzhen Global Test Service Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. : GTS20260120005-1-01	Mar. 13, 2026 Date of issue
--	--------------------------------

Equipment under Test : POE injector

Model /Type : PSE802G

Model List : PSE30,PSE801,PSE30G,PSE801G,PSE30TG,PSE30WG-B,
PSE60G,PSE156G,PSE60G-BT,PSE90G,PSE60BT-10G,
PSE60BT-2.5G,PSE90BT-10G,PSE90BT-2.5G,POE-4805L,
PSE24-30TG,PSE60C,PSE30C,PSE90C

Model different : All models are identical to each other except for model name.

Classification of equipment : Class B

Highest internal frequency : Below 108MHz

Applicant : **SDAPO Communication Co., Ltd.**

Address : 5F, W2, Chengxin Building , Tian An Shen Chuang Valley Industrial Center, Fenggang Town, Dongguan City, Guangdong Province, China

Manufacturer : **SDAPO Communication Co., Ltd.**

Address : 5F, W2, Chengxin Building , Tian An Shen Chuang Valley Industrial Center, Fenggang Town, Dongguan City, Guangdong Province, China

Test Result	Pass
--------------------	-------------

The above equipment has been tested by Shenzhen Global Test Service Co., Ltd., and found compliance with the requirements set forth in the EMC Directive 2014/30/EU technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Contents

1. TEST SUMMARY	5
2. EUT INFORMATION	6
2.1. I/O Port Description	6
2.2. EUT operation mode	6
2.3. EUT configuration	7
3. TEST ENVIRONMENT	8
3.1. Address of the test laboratory	8
3.2. Test Facility	8
3.3. Test Software	8
3.4. Statement of the measurement uncertainty	9
3.5. Test Site Environmental	10
3.6. Test Instruments	11
4. TEST CONDITIONS AND RESULTS	13
4.1. Conducted Emission	13
4.1.1 Limits	13
4.1.2 Test Configuration	13
4.1.3 Test Procedure	14
4.1.4 Test Results	15
4.2. Radiated Emission	19
4.2.1 Limit	19
4.2.2 Test Configuration	20
4.2.3 Test Procedure	22
4.2.4 Test Results	23
4.3. Harmonic Current	25
4.3.1 Limit	25
4.3.2 Test Configuration	26
4.3.3 Test Procedure	26
4.3.4 Test Results	26
4.4. Voltage Fluctuation and Flicker	27
4.4.1 Limit	27
4.4.2 Test Configuration	27
4.4.3 Test Procedure	28
4.4.4 Test Results	28
4.5. Electrostatic Discharge (ESD)	29
4.5.1 Test Specification	29
4.5.2 Test Configuration	29
4.5.3 Test Procedure	29
4.5.4 Test Results	30
4.6. Radiated Electromagnetic Field (RS)	31
4.6.1 Test Specification	31
4.6.2 Test Configuration	31
4.6.3 Test Procedure	31
4.6.4 Test Results	32
4.7. Electrical Fast Transient/Burst (EFT)	33
4.7.1 Test Specification	33
4.7.2 Test Configuration	33
4.7.3 Test Procedure	33
4.7.4 Test Results	34

- 4.8. Surge 35
 - 4.8.1 Test Specification 35
 - 4.8.2 Test Configuration 35
 - 4.8.3 Test Procedure 35
 - 4.8.4 Test Results 36
- 4.9. Conducted Susceptibility (CS) 37
 - 4.9.1 Test Specification 37
 - 4.9.2 Test Configuration 37
 - 4.9.3 Test Procedure 38
 - 4.9.4 Test Results 38
- 4.10. Power Frequency Magnetic Field (PMF) 39
 - 4.10.1 Test Specification 39
 - 4.10.2 Test Configuration 39
 - 4.10.3 Test Procedure 39
 - 4.10.4 Test Results 39
- 4.11. Voltage Dips and Interruptions 40
 - 4.11.1 Test Specification 40
 - 4.11.2 Test Configuration 40
 - 4.11.3 Test Procedure 40
 - 4.11.4 Test Results 41
- 5. TEST SETUP PHOTOS OF THE EUT 42**
- 6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT 48**
 - 6.1. External photos of the EUT 48
 - 6.2. Internal photos of the EUT 50

1. TEST SUMMARY

Emission			
Standard	Item	Verdict	Remark
EN 55032: 2015+A11:2020+A1: 2020	Conducted Emission	PASS	Meet Class B limit
	Radiated Emission	PASS	Meet Class B limit
EN 61000-3-3: 2013+A1:2019+A2: 2021	Voltage Fluctuations & Flicker	PASS	Meets the requirements
EN IEC 61000-3-2: 2019+A1: 2021+A2:2024	Harmonic Current Emissions	N/A	For the equipment with rate power of 75W or less, limits are not specified in this standard

Immunity (EN 55035: 2017+A11: 2020)			
Standard	Item	Result	Remark
EN 61000-4-2: 2009	ESD	PASS	Meets the requirements of Criterion B
EN 61000-4-3: 2006 +A1:2008+A2:2010	RS	PASS	Meets the requirements of Criterion A
EN 61000-4-4: 2012	EFT	PASS	Meets the requirements of Criterion B
EN 61000-4-5: 2014+ A1:2017	Surge	PASS	Meets the requirements of Criterion B
EN 61000-4-6: 2014	CS	PASS	Meets the requirements of Criterion A
EN 61000-4-8:2009	PMF	N/A	Applicable only to containing devices susceptible to magnetic fields
EN IEC 61000-4-11: 2020	Voltage Dips & Voltage Variations	PASS	Meets the requirements of Voltage Dips: 1) >95% reduction Criterion B 2) 30% reduction Criterion C Voltage Interruptions: >95% reduction Criterion C

The test results of this report was related only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

2. EUT INFORMATION

2.1. I/O Port Description

I/O Port Types	Q'TY	Test Description
1). /	/	/

Note: Internal ports are only used during installation so are not considered.


2.2. EUT operation mode

Pre-Test Mode	Mode 1: Data transmission+Full Load		
Final Test Mode	Conducted Emission		Mode 1
	Radiates Emission	Below 1GHz	Mode 1
		Above 1GHz	N/A, highest internal frequency below 108MHz
	Harmonic Current Emissions		N/A,for the equipment with rate power of 75W or less, limits are not specified in this standard
	Voltage Fluctuations & Flicker		Mode 1
	ESD		Mode 1
	RS		Mode 1
	EFT		Mode 1
	Surge		Mode 1
	CS		Mode 1
	PMF		N/A, Applicable only to containing devices susceptible to magnetic fields
Voltage Dips & Voltage Variations		Mode 1	

Then, the above highest emission mode of the configuration of the EUT and cable was chosen for all final test items.

2.3.EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

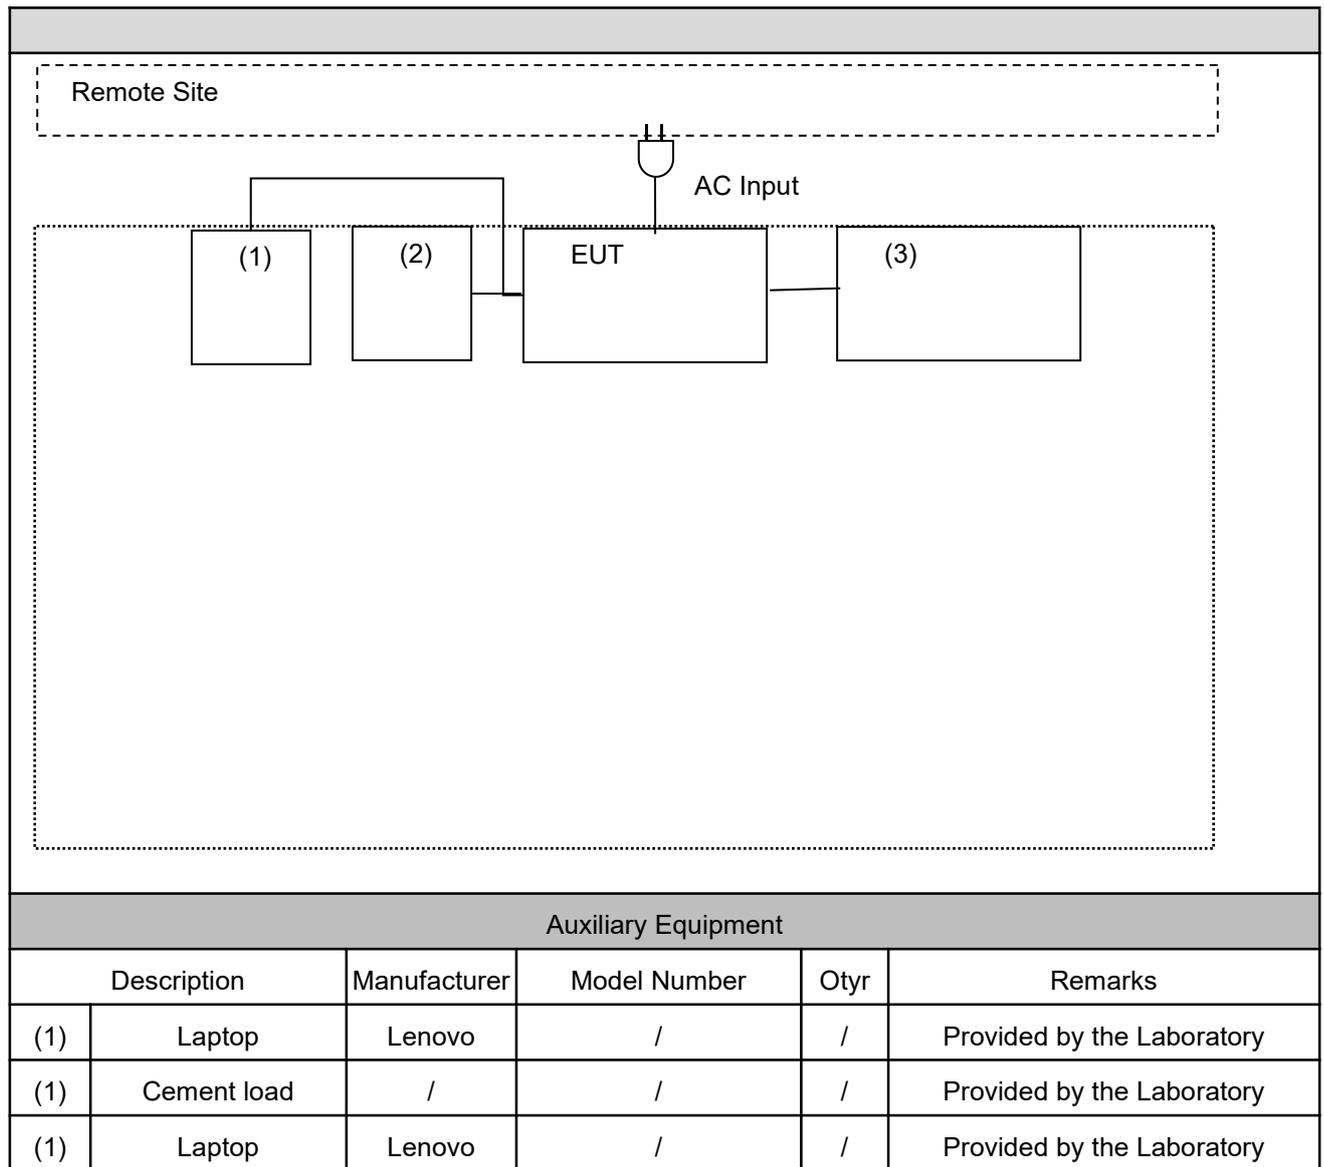

Auxiliary Equipment

	Description	Manufacturer	Model Number	Otyr	Remarks
(1)	Laptop	Lenovo	/	/	Provided by the Laboratory
(1)	Cement load	/	/	/	Provided by the Laboratory
(1)	Laptop	Lenovo	/	/	Provided by the Laboratory

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Global Test Service Co., Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L8169)

Shenzhen Global Test Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA (Certificate No. 4758.01)

Shenzhen Global Test Service Co., Ltd. has been assessed by the American Association for Laboratory Accreditation (A2LA). Certificate No. 4758.01.

3.3. Test Software

Measurement Software			
No.	Description	Software	Version
1	Conducted Emission	JS32-RE	Ver 2.5
2	Radiated Emission _ Below 1GHz	JS32-RE	Ver 2.5.1.8
3	Radiated Emission _ Above 1GHz	JS32-RE	Ver 2.5.1.8
4	Harmonic Current Emissions	Harcs	4.21.0.0
5	Voltage Fluctuations & Flicker	Harcs	4.21.0.0
6	RS	EMC-RS	2.0.1.2
7	CS	IEC/EN 61000-4-6	V1.1.2

3.4. Statement of the measurement uncertainty

Test Item	Test Site	Frequency Range		Uncertainty (dB)
Conducted Emission AC Power Port	Conductive Shielding Room	9 kHz ~ 150 kHz		1.6
		150 kHz ~ 30 MHz		1.6
Conducted Emission Telecommunication Port		150 kHz ~ 30 MHz		2.08
Radiated Emission	966	30 MHz ~ 1000 MHz	Horizontal	3.95
			Vertical	3.95
		1000 MHz ~ 6000 MHz		4.57

Note: The Vertical and Horizontal measurement uncertainty of 1GHz to 6GHz is evaluated and choose which polarity is worst value.

Test Item	Uncertainty	
Harmonic Current Emission	36 mA/A	
Voltage Fluctuations And Flicker	4.4 mV/V	
Electrostatic Discharge	Voltage	0.86 %
	Current	2.5 %
	Timing	6.0 %
Radiated Susceptibility	3.2 dB	
Electrical Fast Transient/Burst	2 %	
Surge	Voltage	3 %
	Current	3 %
	Timing	3 %
Conducted Susceptibility	CDN	3.8 dB
	EM Clamp/Direct Injection	2.8 dB
Power Frequency Magnetic Field	36 mA/A	
Voltage Dips and Interruption	Voltage	1.004 %
	Timing	1.004 %

3.5. Test Site Environmental

Test Item	Required (IEC 60068-1)		Actual
Conducted Emission	Temperature (°C)	15-35	24.3
	Humidity (%RH)	25-75	52
	Barometric pressure (mbar)	860-1060	1001
Radiated Emission	Temperature (°C)	15-35	23.5
	Humidity (%RH)	25-75	51
	Barometric pressure (mbar)	860-1060	1001
Harmonic Current Emissions	Temperature (°C)	--	--
	Humidity (%RH)	--	--
	Barometric pressure (mbar)	--	--
Voltage Fluctuations & Flicker	Temperature (°C)	--	24.7
	Humidity (%RH)	--	52
	Barometric pressure (mbar)	--	1001
ESD	Temperature (°C)	15-35	22.6
	Humidity (%RH)	30-60	53
	Barometric pressure (mbar)	860-1060	1001
RS	Temperature (°C)	--	23.5
	Humidity (%RH)	--	51
	Barometric pressure (mbar)	--	1001
EFT	Temperature (°C)	15-35	22.6
	Humidity (%RH)	30-60	53
	Barometric pressure (mbar)	860-1060	1001
Surge	Temperature (°C)	15-35	22.6
	Humidity (%RH)	10-75	53
	Barometric pressure (mbar)	860-1060	1001
CS	Temperature (°C)	--	22.6
	Humidity (%RH)	--	53
	Barometric pressure (mbar)	--	1001
PMF	Temperature (°C)	15-35	--
	Humidity (%RH)	25-75	--
	Barometric pressure (mbar)	860-1060	--
Voltage Dips & Voltage Variations	Temperature (°C)	15-35	22.6
	Humidity (%RH)	25-75	53
	Barometric pressure (mbar)	860-1060	1001

3.6. Test Instruments

Conducted Emission test site					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Test Receiver	R&S	ESPI 3	101841	2025/06/26	1 year
Transient Limiter	CYBERTEK	EM5010A	E1950100106	2025/06/27	1 year
LISN	R&S	ESH2-Z5	893606/008	2025/06/27	1 year
LISN	CYBERTEK	EM5040A	E1850400105	2025/06/27	1 year
ISN	SCHWARZBECK	NTFM 8158	066	2025/06/27	1 year
ISN	SCHWARZBECK	CAT5 8158	121	2025/06/27	1 year
ISN	SCHWARZBECK	CAT3 8158	102	2025/06/27	1 year
Test Site	XINJU	Conductive Shielding Room	N/A	N.C.R.	----

966 Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Amplifier	SKET	LAPA 30M01G	SK20240104001	2025/12/23	1 year
Amplifier	EMCI	EMC012645SE	980340	2025/12/23	1 year
Test Receiver	R&S	ESCI 7	101102	2025/06/26	1 year
Spectrum Analyzer	R&S	FSV40-N	101800	2025/06/21	1 year
Broadband Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB 9163	00976	2025/07/15	1 year
Double Ridged Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	01622	2025/12/01	1 year
Test Site	XINJU	966	N/A	2025/06/29	3 year

Harmonics Current / Voltage Fluctuation and Flicker test site					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Harmonics & Flicker Tester	EMC-PARTNER AG	HARMONICS 1000	HAR1000-1P 230V-0221	2025/06/27	1 year
Test Site	XINJU	RF Shielding Room	N/A	N.C.R.	----

Electrostatic Discharge test site					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
ESD Simulator	EMC PARTNER	ESD3000	ESD3000-1680	2025/06/13	1 year
0.8m Height Wooden Table	N/A	N/A	N/A	N.C.R.	----
Test Site	EMS Lab	N/A	N/A	N.C.R.	----

Radiated Electromagnetic Field test site					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Signal Generator	Agilent	N5181A	MY50145351	2025/06/21	1 year
Power Head	Agilent	E9301A	MY41496608	2025/06/21	1 year
Power Head	Agilent	E9301A	MY41495308	2025/06/21	1 year
Amplifier	Mic-Top	MPA-80-1000-250	MPA2210372	2025/06/21	1 year
Amplifier	Mic-Top	MPA-1000-6000-10	MPA2210371	2025/06/21	1 year
Transmit Antenna	Schwarzbeck	VULP 9118 E	01036	2025/12/23	1 year
Transmit Antenna	Schwarzbeck	STLP9149	00814	2025/12/23	1 year
Field Probe	PMM	EP601	811ZX10352	2025/07/01	1 year
Test Software	Tonscend	JS35-R	N/A	-----	-----

Electrical Fast Transient/Burst / Surge / Voltage Dips and Interruption test site					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
EMC Immunity Tester	EMC-PARTNER AG	TRANSIENT 3000	TRA3000 F5-S-D-V-1527	2025/06/21	1 year
Coupling Clamp	EMC-PARTNER AG	CN-EFT1000	CN-EFT1000-1574	2025/06/27	1 year
Signal Line Coupling Network	EXPERT IN EMC LIONCEL	CDN-508SUS	200502	2025/06/27	1 year
Surge Generator	EXPERT IN EMC LIONCEL	LSG-506CT	220902	2025/06/21	1 year
Test Site	EMS Lab	N/A	N/A	N.C.R.	-----

Conducted disturbances induced by radio-frequency fields					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Conducted Immunity Test System	FEANKONIA	CIT-10-75	126B1333	2025/06/27	1 year
Coupling Decoupling Network	FEANKONIA	M2/M3	A2210239	2025/06/27	1 year
Coupling Decoupling Network	LuTHi	CDN801-M4	1583	2025/06/27	1 year
6dB attenuator	FRANKONIA	75-A-FFN-06	1317980	2025/06/26	1 year

Power Frequency Magnetic Field					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
PFMF test system	PMI	YMAG1000	930668	2025/06/27	1 year

4. TEST CONDITIONS AND RESULTS

4.1. Conducted Emission

4.1.1 Limits

A.C. Mains Conducted Interference Limit

Frequency (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Note: (1) The lower limit shall apply at the transition frequencies.


(2) The limit decreases in line with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

(3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

Telecommunication Port Asymmetric mode Conducted Interference Limit

Requirement (MHz)	Class A Equipment				Class B Equipment			
	Voltage Limit (dBµV)		Current Limit (dBµA)		Voltage Limit (dBµV)		Current Limit (dBµA)	
	QP	Avg.	QP	Avg.	QP	Avg.	QP	Avg.
0.15 to 0.50	97 to 87	84 to 74	53 to 43	40 to 30	84 to 74	74 to 64	40 to 30	30 to 20
0.50 to 30	87	74	43	30	74	64	30	20

4.1.2 Test Configuration

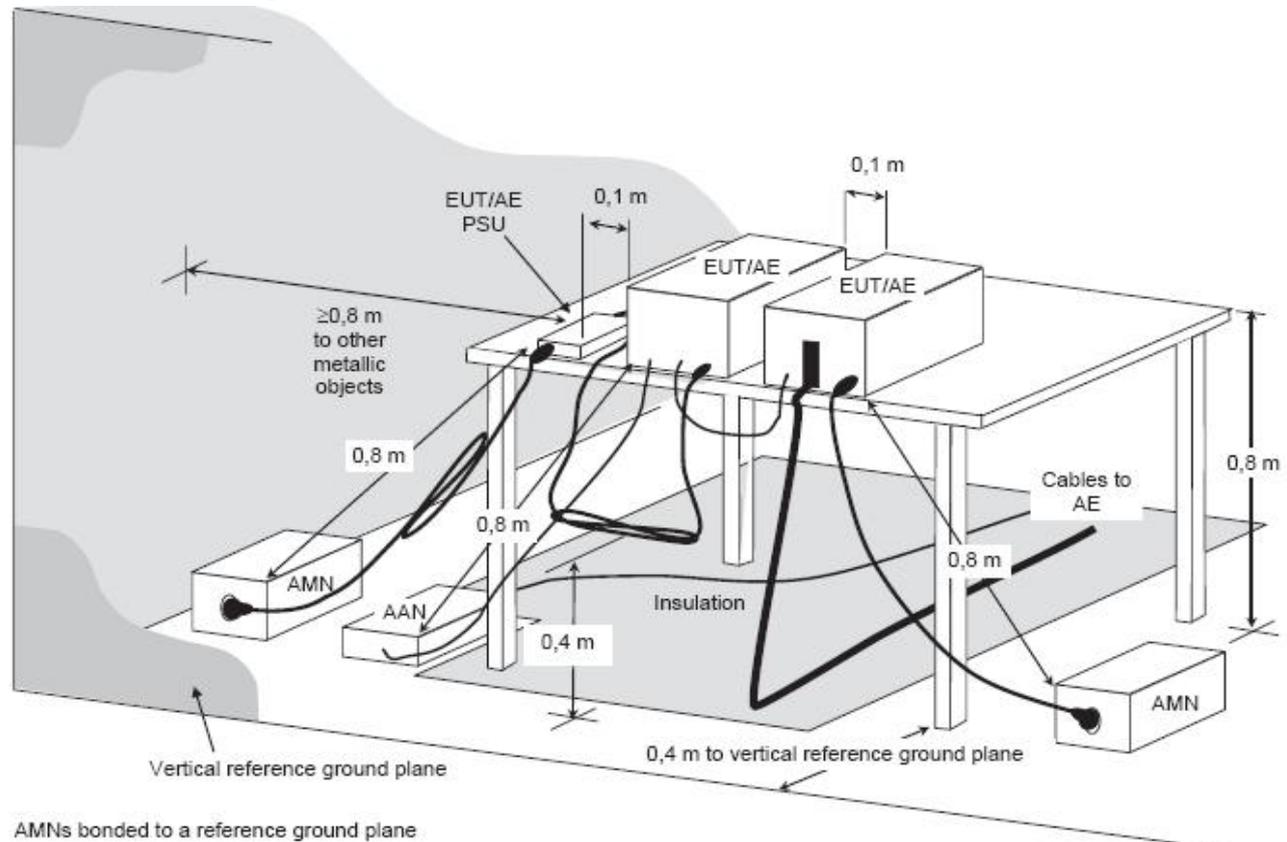

4.1.3 Test Procedure

A.C. Mains Conducted Interference

Procedure of Preliminary Test

The EUT and support equipment, if needed, were set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per EN 55032 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane, which has a less than 15 cm non-conductive covering to insulate the EUT from the ground plane.

All I/O cables were positioned to simulate typical actual usage as per EN 55032.

The EUT installed by AC main power, through a Line Impedance Stabilization Network (LISN), which was supplied power source and was grounded to the ground plane.

All support equipment power by a second LISN.

The test program of the EUT was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in Item 3.1 were scanned during the preliminary test.

After the preliminary scan, we found the test mode described in Item 3.1 producing the highest emission level.

The worst configuration of EUT and cable of the above highest emission level were recorded for reference of the final test.

Procedure of Final Test

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

Cables connecting to AE located outside the measurement area shall drop directly to, but be insulated from, the RGP shall be used thickness of the insulation and shall not be more than 150 mm. However, cables which would normally be bonded to ground should be bonded to the RGP in accordance with normal practice or the manufacturer's recommendation

Telecommunication Port Conducted Interference

Selecting ISN for unscreened cable and screened cable to make measurement and Current probe for coaxial cable.

The port of the EUT was connected to the remote side support equipment through the ISN/Current Probe and communication in normal condition.

Making a overall range scan by using the test receiver controlled by controller and record at least six highest emissions for showing in the test report.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.


In case of measuring on the screened cable, the current limit shall be applied; otherwise the voltage limit should be applied.

4.1.4 Test Results

A.C. Mains Port:

Test Standard:	EN 55032	Power Line:	L1
Test Mode:	Mode 1	Test Power:	AC 230 V/50 Hz
Description:			

Test Graph

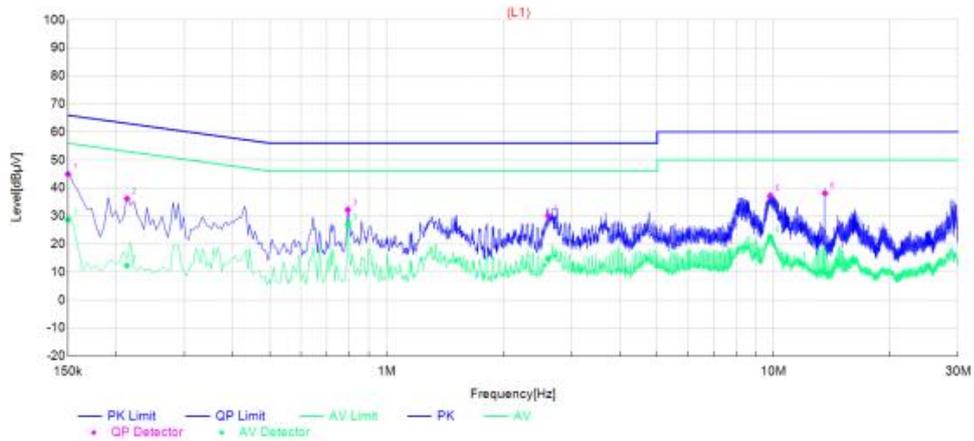

Final Data List


NO.	Frequency [MHz]	QP Reading [dBµV]	AVG. Reading [dBµV]	Factor [dB]	QP Result [dBµV]	AVG. Result [dBµV]	QP Limit [dBµV]	AVG. Limit [dBµV]	QP Margin [dB]	AVG. Margin [dB]	Line	Remark
1	0.15	34.65	18.29	10.35	45.00	28.64	66.00	56.00	21.00	27.36	L1	PASS
2	0.213	26.07	2.15	10.14	36.21	12.29	63.09	53.09	26.88	40.80	L1	PASS
3	0.7935	21.98	16.77	10.25	32.23	27.02	56.00	46.00	23.77	18.98	L1	PASS
4	2.6115	19.79	4.45	10.31	30.10	14.76	56.00	46.00	25.90	31.24	L1	PASS
5	9.7935	26.58	11.88	10.57	37.15	22.45	60.00	50.00	22.85	27.55	L1	PASS
6	13.578	27.21	-1.10	10.88	38.09	9.78	60.00	50.00	21.91	40.22	L1	PASS

Note: 1. Result (dBµV) = Reading (dBµV) + Factor (dB).

2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Test Standard: EN 55032 Power Line: N
 Test Mode: Mode 1 Test Power: AC 230 V/50 Hz
 Description:

Test Graph

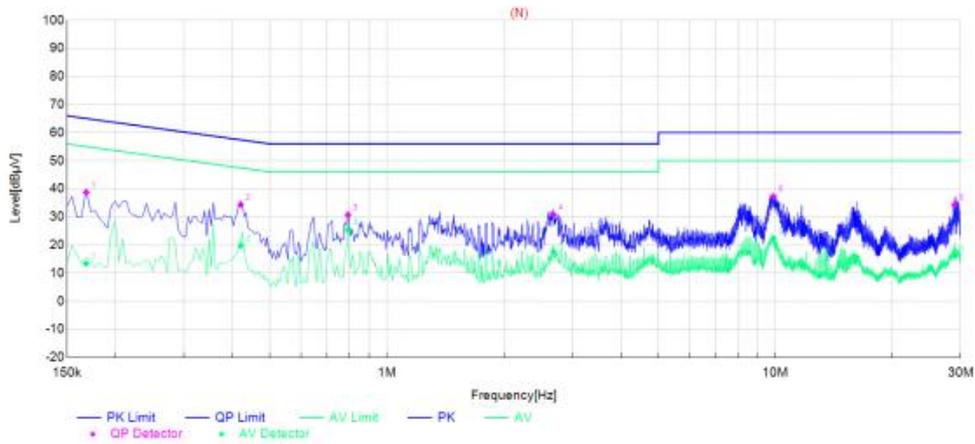

Final Data List


NO.	Frequency [MHz]	QP Reading [dBµV]	AVG. Reading [dBµV]	Factor [dB]	QP Result [dBµV]	AVG. Result [dBµV]	QP Limit [dBµV]	AVG. Limit [dBµV]	QP Margin [dB]	AVG. Margin [dB]	Line	Remark
1	0.168	28.48	3.12	10.27	38.75	13.39	65.06	55.06	26.31	41.67	N	PASS
2	0.42	24.17	9.57	10.18	34.35	19.75	57.45	47.45	23.10	27.70	N	PASS
3	0.7935	20.48	15.22	10.25	30.73	25.47	56.00	46.00	25.27	20.53	N	PASS
4	2.6835	20.49	7.27	10.32	30.81	17.59	56.00	46.00	25.19	28.41	N	PASS
5	9.897	26.56	11.69	10.58	37.14	22.27	60.00	50.00	22.86	27.73	N	PASS
6	28.9185	22.55	4.50	11.75	34.30	16.25	60.00	50.00	25.70	33.75	N	PASS

Note: 1. Result (dBµV) = Reading (dBµV) + Factor (dB).
 2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Telecommunication Port:

Test Standard:	EN 55032	Line:	100M
Test Mode:	Mode 1	Test Power:	AC 230 V/50 Hz
Description:			

Test Graph

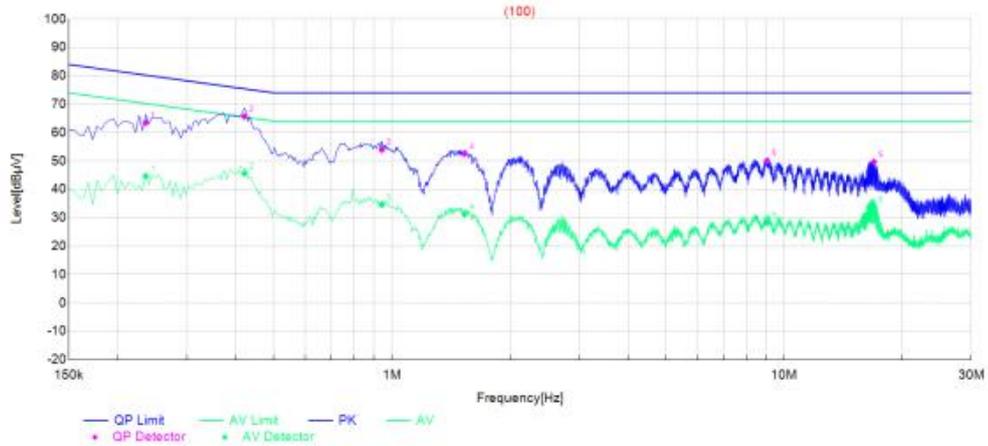

Final Data List

NO.	Frequency [MHz]	QP Reading [dBµV]	AVG. Reading [dBµV]	Factor [dB]	QP Result [dBµV]	AVG. Result [dBµV]	QP Limit [dBµV]	AVG. Limit [dBµV]	QP Margin [dB]	AVG. Margin [dB]	Line	Remark
1	0.2355	43.70	24.85	19.80	63.50	44.65	80.25	70.25	16.75	25.60	100	PASS
2	0.42	46.01	25.93	19.66	65.67	45.59	75.45	65.45	9.78	19.86	100	PASS
3	0.942	34.50	15.08	19.43	53.93	34.51	74.00	64.00	20.07	29.49	100	PASS
4	1.5315	33.10	11.78	19.44	52.54	31.22	74.00	64.00	21.46	32.78	100	PASS
5	9.042	30.71	8.74	19.38	50.09	28.12	74.00	64.00	23.91	35.88	100	PASS
6	16.9305	30.26	14.40	19.46	49.72	33.86	74.00	64.00	24.28	30.14	100	PASS

Note: 1. Result (dBµV) = Reading (dBµV) + Factor (dB).
 2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

4.2. Radiated Emission

4.2.1 Limit

Frequency (MHz)	dBuV/m (Distance 3 m)	
	Class A	Class B
30 ~ 230	50	40
230 ~ 1000	57	47

Note: The lower limit shall apply at the transition frequencies.

Frequency (MHz)	dBuV/m (Distance 3 m)			
	Class A		Class B	
	Average	Peak	Average	Peak
1000 ~ 6000	60	80	54	74


Note: The lower limit shall apply at the transition frequencies.

According to EN55032 the measurement frequency range is shown in the following table:


Highest frequency generated or used within the EUT or on which the EUT operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Less than 108	1000
108-500	2000
500-1000	5000
Above 1000	5 times of the highest frequency or 6GHz, whichever is less

4.2.2 Test Configuration

■ Below 1GHz

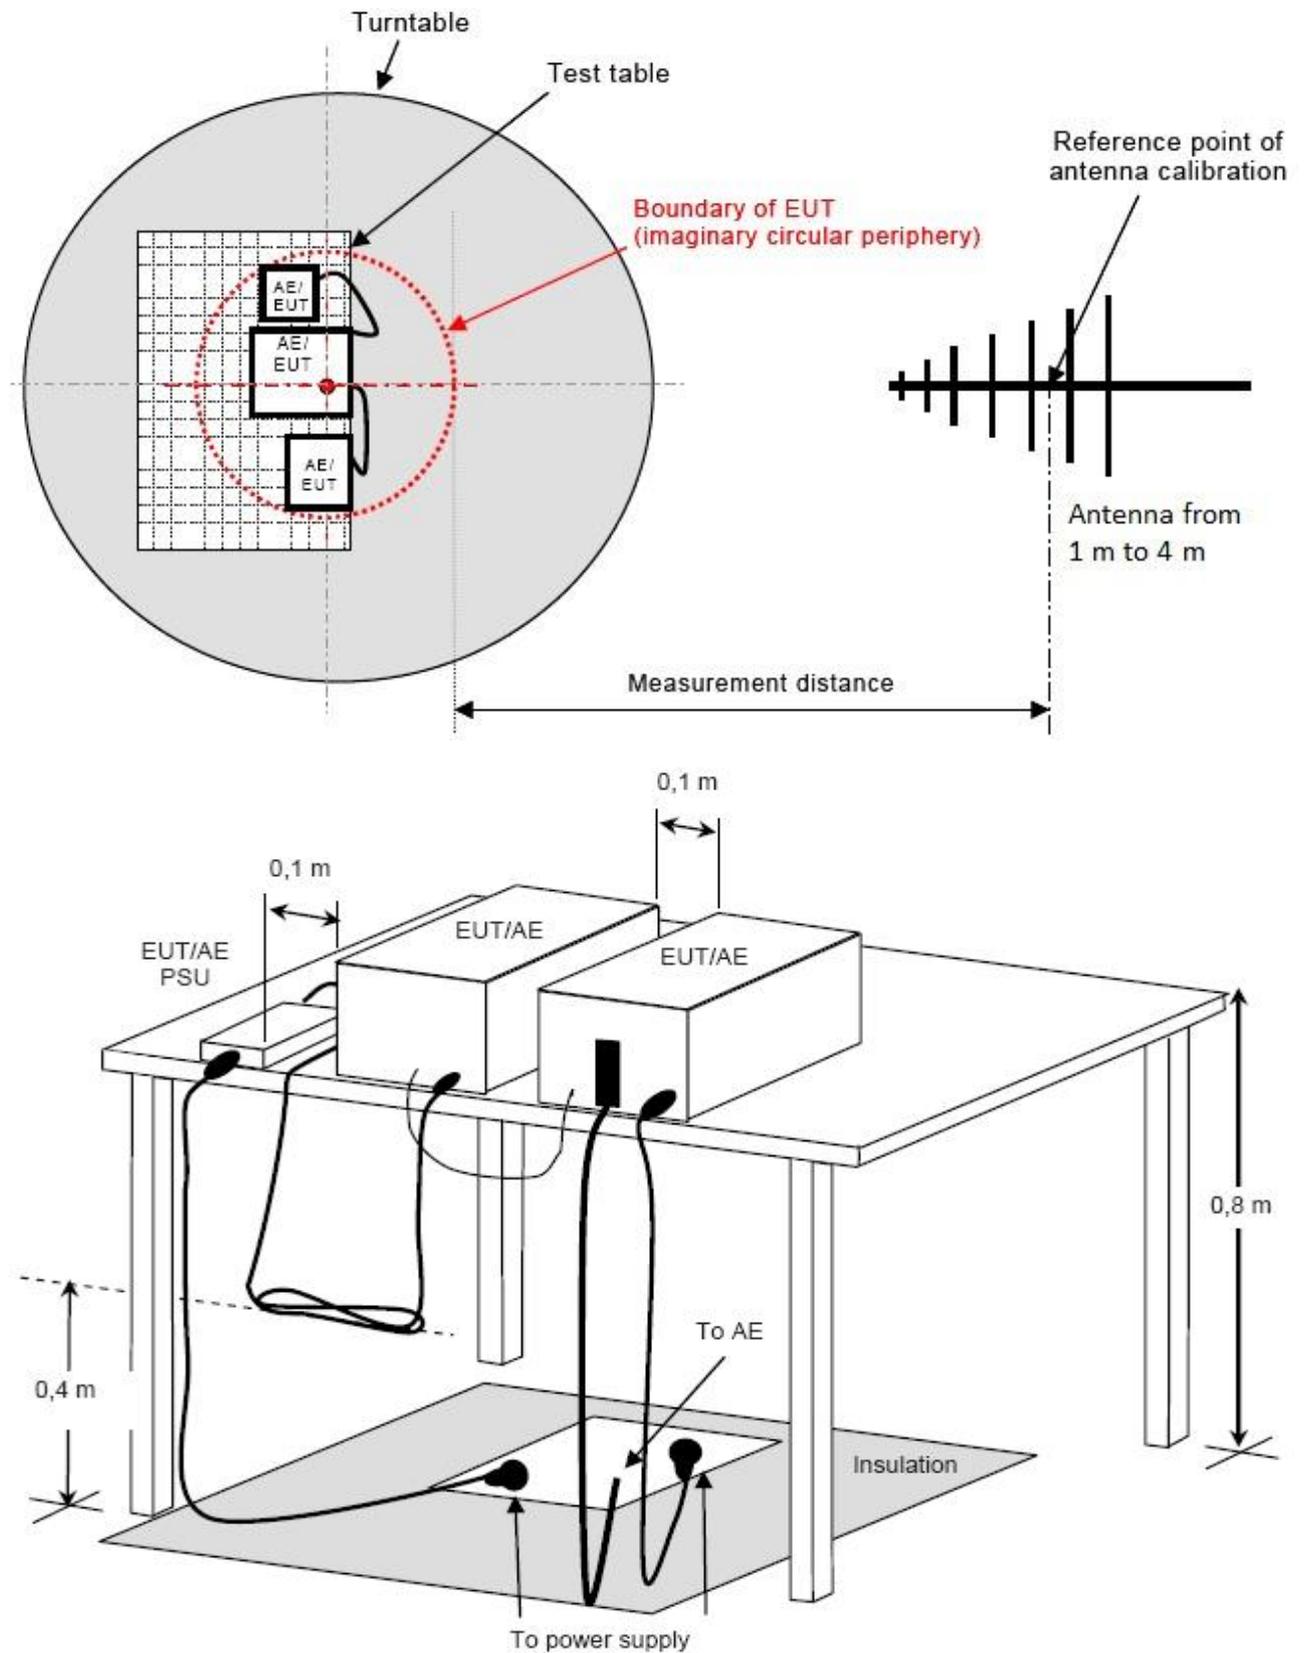

■ Above 1GHz

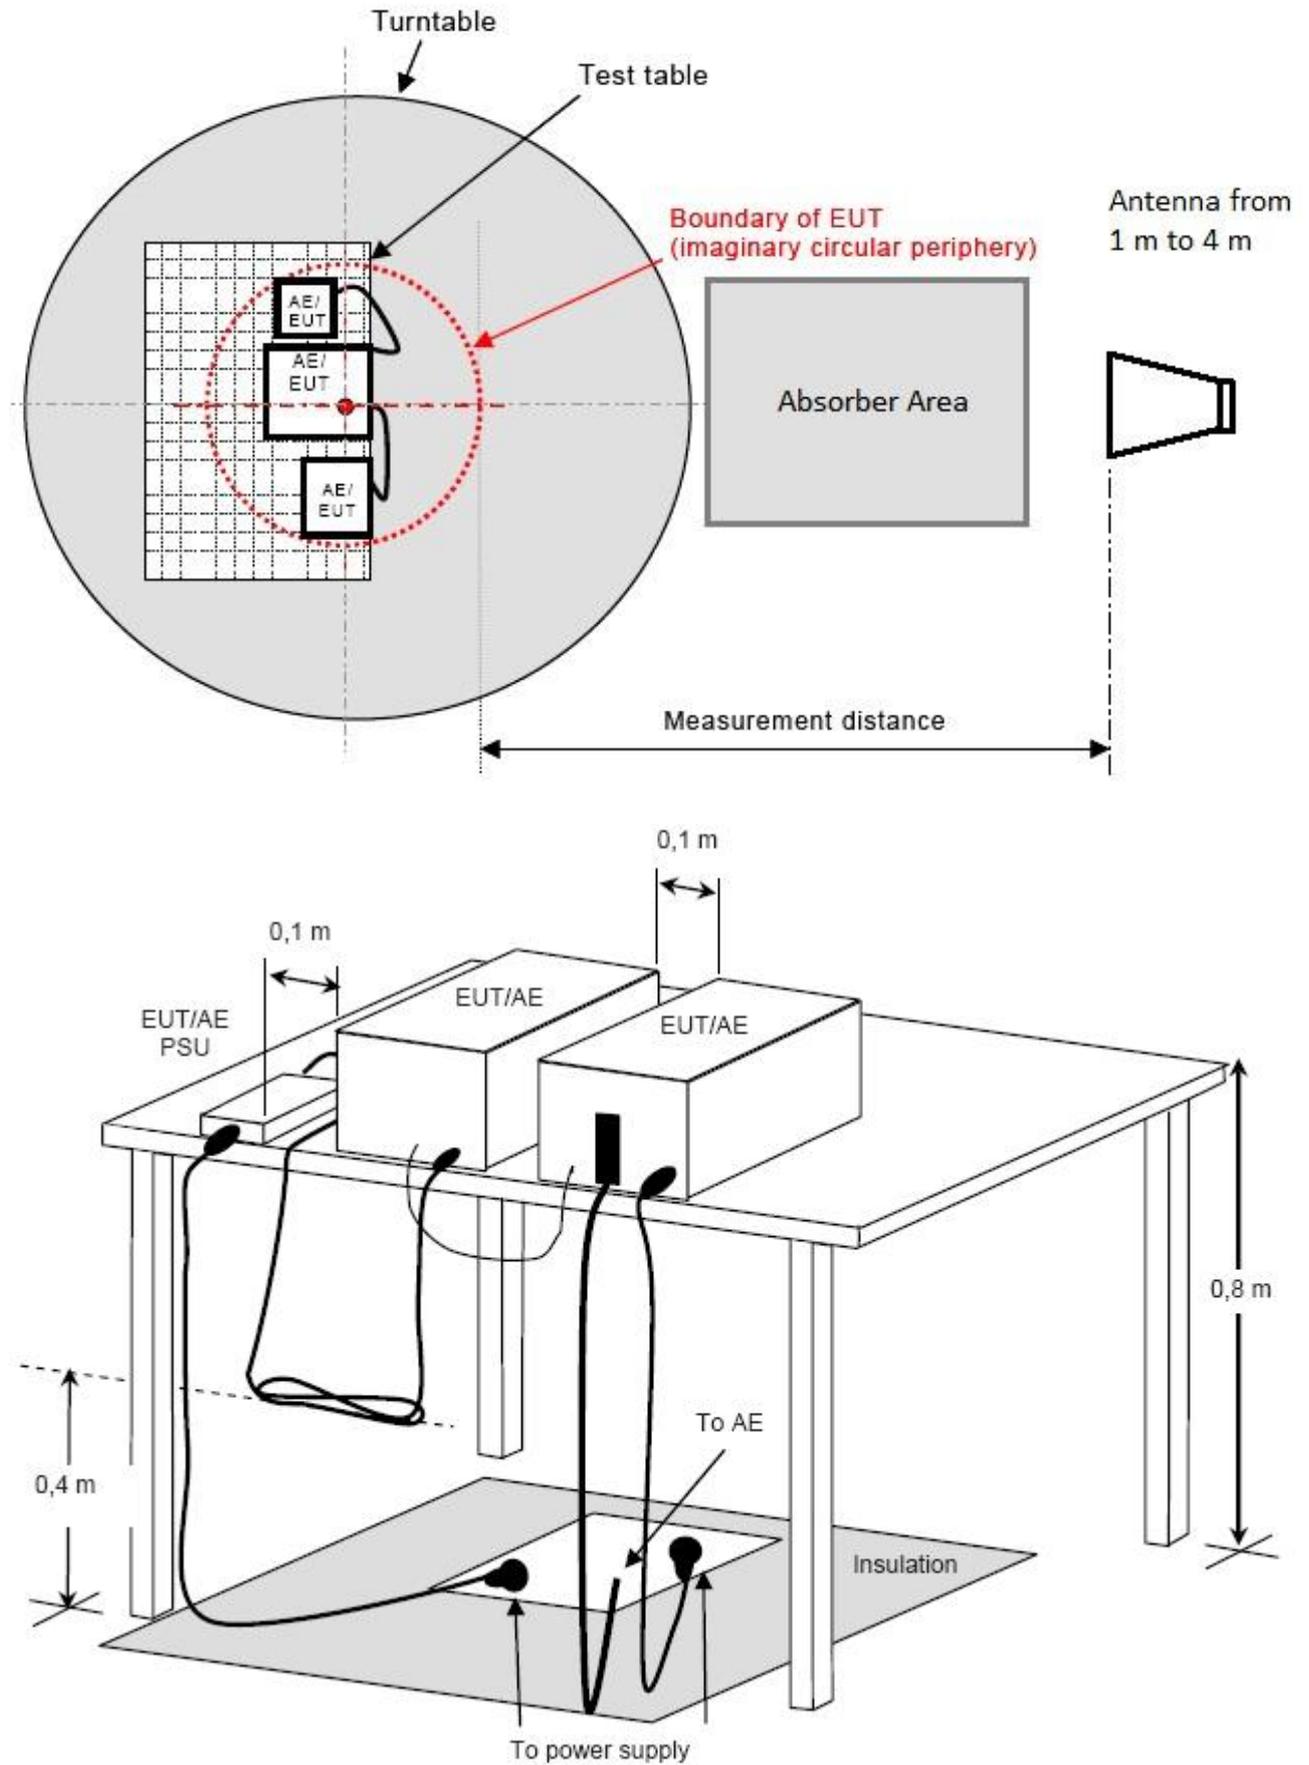

4.2.3 Test Procedure

■ Procedure of Preliminary Test.

The equipment was set up as per the test configuration to simulate typical usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane. When the EUT is a floor ADAPTERing equipment, it is placed on the ground plane which has a less than 150 mm non-conductive covering to insulate the EUT from the ground plane.

Support equipment, if needed, was placed as per EN 55032.

All I/O cables were positioned to simulate typical usage as per EN 55032.

The EUT received AC power source from the outlet socket under the turntable. All support equipment power received from another socket under the turntable.

The antenna was placed at 3 or 10 meter away from the EUT as stated in EN 55032 Annex C.2.2.4 Figure C.1 and Annex D Table D.1. The antenna connected to the Spectrum Analyzer via a cable and at times a pre-amplifier would be used.

The Analyzer / Receiver quickly scanned from 30MHz to 6GHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level (For Below 1GHz) and keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response (For Above 1GHz).

The test mode(s) described in Item 3.1 were scanned during the preliminary test:

After the preliminary scan, we found the test mode described in Item 3.1 producing the highest emission level. The worst configuration of EUT and cable, antenna position, polarization and turntable position of the above highest emission levels were recorded for the final test.

■ Procedure of Final Test

EUT and support equipment were set up on the turntable as per the configuration with highest emission level in the preliminary test.

The Analyzer / Receiver scanned from 30MHz to 6000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

Recording at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and Q.P. (For Below 1GHz) or Peak/Average (For Above 1GHz) reading is presented.


Cables connecting to AE located outside the measurement area shall drop directly to, but be insulated from, the RGP (or turntable where applicable), and then be routed directly to the place where they leave the test site. The thickness of the insulation shall not be more than 150 mm. However, cables which would normally be bonded to ground should be bonded to the RGP in accordance with normal practice or the manufacturer's recommendation

4.2.4 Test Results

Below 1GHz

Test Standard:	EN 55032	Test Distance:	3 m
Test Mode:	Mode 1	Test Power:	AC 230V /50Hz
Measurement Range:	30 MHz~1 GHz	Ant.Polar.:	Horizontal
Description:			

Test Graph

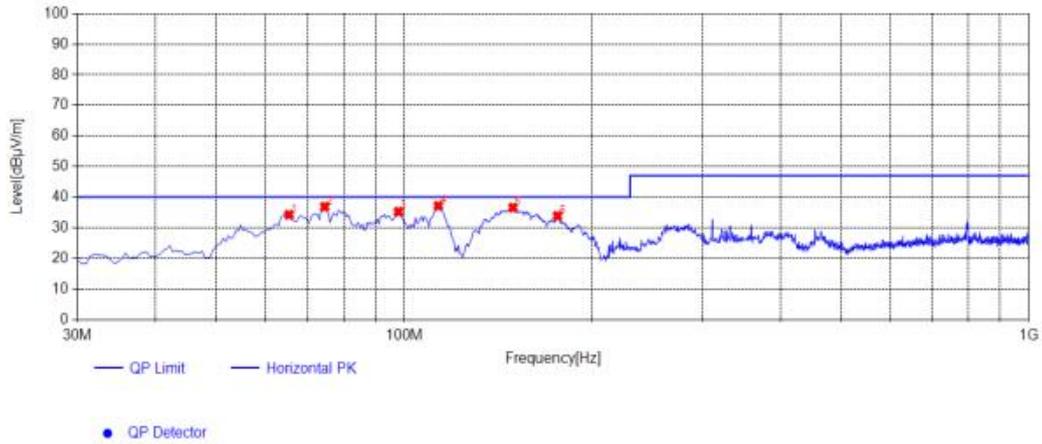

Suspected List


NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	65.405	47.02	-12.79	34.23	40.00	5.77	100	4	PK	Horizontal	PASS
2	74.62	51.01	-14.14	36.87	40.00	3.13	100	23	PK	Horizontal	PASS
3	97.9	47.21	-11.98	35.23	40.00	4.77	100	38	PK	Horizontal	PASS
4	113.42	49.11	-11.97	37.14	40.00	2.86	100	4	PK	Horizontal	PASS
5	149.31	50.78	-14.21	36.57	40.00	3.43	100	8	PK	Horizontal	PASS
6	175.985	46.30	-12.46	33.84	40.00	6.16	100	357	PK	Horizontal	PASS

Note:1. $Result (dBuV/m) = Reading(dBuV/m) + Factor (dB)$.

2. $Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)$.

Test Standard:	EN 55032	Test Distance:	3 m
Test Mode:	Mode 1	Test Power:	AC 230V/ 50Hz
Measurement Range:	30 MHz~1 GHz	Ant.Polar.:	Vertical
Description:			

Test Graph

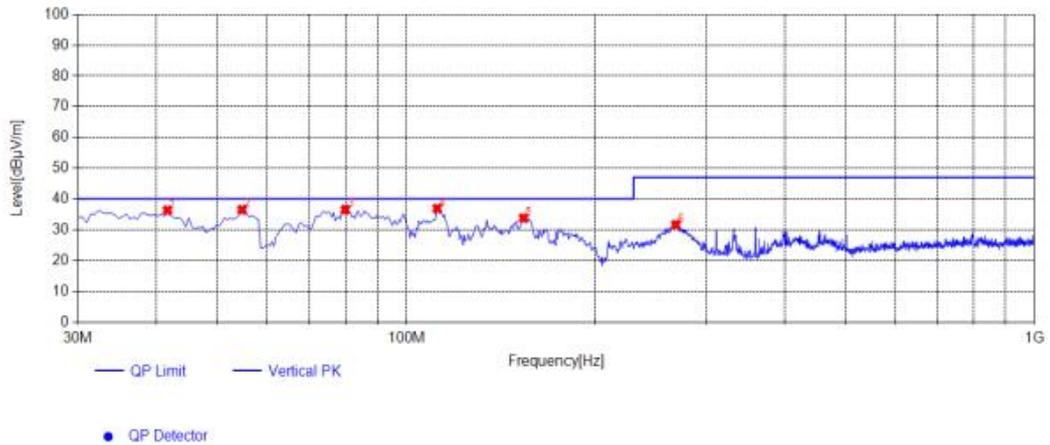

Suspected List

NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	41.64	48.01	-11.68	36.33	40.00	3.67	100	63	PK	Vertical	PASS
2	54.735	47.66	-11.17	36.49	40.00	3.51	100	63	PK	Vertical	PASS
3	79.955	50.97	-14.41	36.56	40.00	3.44	100	11	PK	Vertical	PASS
4	111.965	48.75	-11.84	36.91	40.00	3.09	100	26	PK	Vertical	PASS
5	153.675	47.59	-13.81	33.78	40.00	6.22	100	33	PK	Vertical	PASS
6	268.62	39.58	-7.93	31.65	47.00	15.35	100	67	PK	Vertical	PASS

Note:1. $Result (dBuV/m) = Reading(dBuV/m) + Factor (dB)$.

2. $Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB)$.

4.3. Harmonic Current

4.3.1 Limit

Class A Harmonics Currents

Harmonics Order n	Maximum Permissible harmonic current (A)	Harmonics Order n	Maximum Permissible harmonic current (A)
Odd harmonics		Even harmonics	
3	2.30	2	1.08
5	1.14	4	0.43
7	0.77	6	0.30
9	0.40	$8 \leq n \leq 40$	$0.23 * 8/n$
11	0.33		
13	0.21		
$15 \leq n \leq 39$	$0.15 * 15/n$		

Class B Harmonics Currents

For Class B equipment, the harmonic of the input current shall not exceed the maximum permissible values given in table which is the limit of Class A multiplied by a factor of 1.5.

Class C Harmonics Currents


Harmonics Order n	Maximum Permissible harmonic current Expressed as a percentage of the input current at the fundamental frequency (%)
2	2
3	$27 \cdot \lambda^*$
5	10
7	7
9	5
$11 \leq n \leq 39$ (odd harmonics only)	3

* λ is the circuit power factor

Class D Harmonics Currents

Harmonics Order n	Maximum Permissible harmonic current per watt (mA/W)	Maximum Permissible harmonic current (A)
3	3.4	2.30
5	1.9	1.14
7	1.0	0.77
9	0.5	0.40
11	0.35	0.33
$11 \leq n \leq 39$ (odd harmonics only)	$3.85/n$	See limit of Class A

4.3.2 Test Configuration

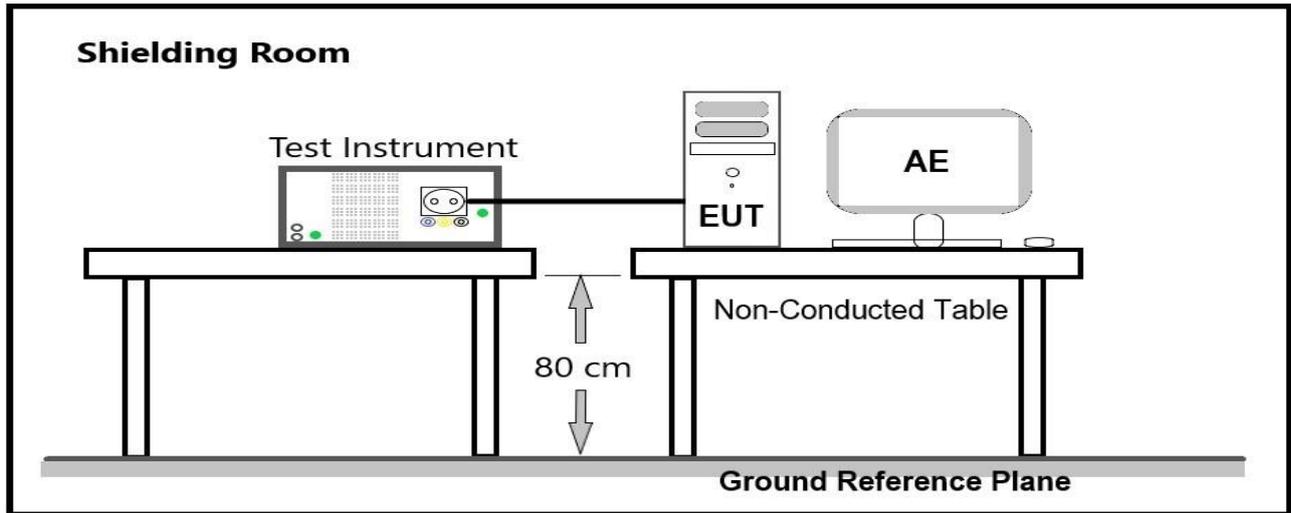

4.3.3 Test Procedure

The EUT was placed on the top of a wooden table 0.8 meters above the ground and the EUT is supplied in series with power analyzer from a power source having the same normal voltage and frequency as the rated supply voltage and the equipment under test. And the rated voltage at the supply voltage of EUT of 0.94 times and 1.06 times shall be performed.

A definition of the normal load or of the conditions for adequate heat discharge can usually be found in the EN publication corresponding to the equipment under test.

Equipment may have several separately controlled circuits. Each circuit is considered as a single piece of equipment if it can be operated independently and separately from the other circuits.

4.3.4 Test Results

N/A

4.4. Voltage Fluctuation and Flicker

4.4.1 Limit

The following limits apply:

- the value of P_{st} shall not be greater than 1.0;
- the value of P_{1t} shall not be greater than 0.65;
- T_{max} , the accumulated time value of $d(t)$ with a deviation exceeding 3,3 % during a single voltage change at the EUT terminals, shall not exceed 500 ms;
- the relative steady-state voltage change, d_c , shall not exceed 3.3 %;
- the maximum relative voltage change, d_{max} , shall not exceed;

a) 4 % without additional conditions;

b) 6 % for equipment which is:

-- switched manually, or

-- switched automatically more frequently than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds), or manual restart, after a power supply interruption.

Note: The cycling frequency will be further limited by the P_{st} and P_{1t} limit.

For example: a d_{max} of 6% producing a rectangular voltage change characteristic twice per hour will give a P_{1t} of about 0.65.


c) 7 % for equipment which is:

-- attended whilst in use (for example: hair dryers, vacuum cleaners, kitchen equipment such as mixers, garden equipment such as lawn mowers, portable tools such as electric drills), or

-- switched on automatically, or is intended to be switched on manually, no more than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds) or manual restart, after a power supply interruption.

P_{st} and P_{1t} requirements shall not be applied to voltage changes caused by manual switching.

4.4.2 Test Configuration

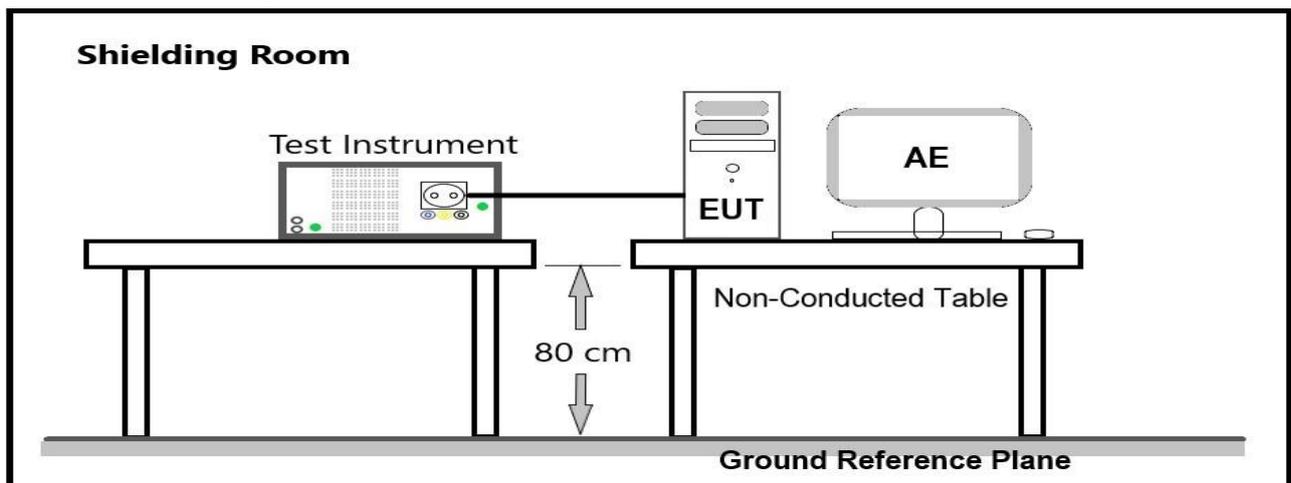

4.4.3 Test Procedure

The EUT is supplied in series with power analyzer from a power source having the same normal voltage and frequency as the rated supply voltage and the equipment under test. And the rated voltage at the supply voltage of EUT of 0.94 times and 1.06 times shall be performed.

The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under normal operating conditions.

During the flick measurement, the measure time shall include that part of whole operation cycle in which the EUT produce the most unfavorable sequence of voltage changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.

4.4.4 Test Results


	EUT values	Limit	Result
Pst	0.07	1.00	PASS
Plt	0.07	0.65	PASS
dc [%]	0.00	3.30	PASS
dmax [%]	0.00	4.00	PASS
dt [s]	0.00	0.50	PASS

4.5. Electrostatic Discharge (ESD)

4.5.1 Test Specification

EN 61000-4-2			
Environmental Phenomena	Units	Test Specification	Performance Criterion
Enclosure Port			
Standard requirement Electrostatic Discharge	kV (Charge Voltage)	±8 Air Discharge ±4 Contact Discharge	B

4.5.2 Test Configuration

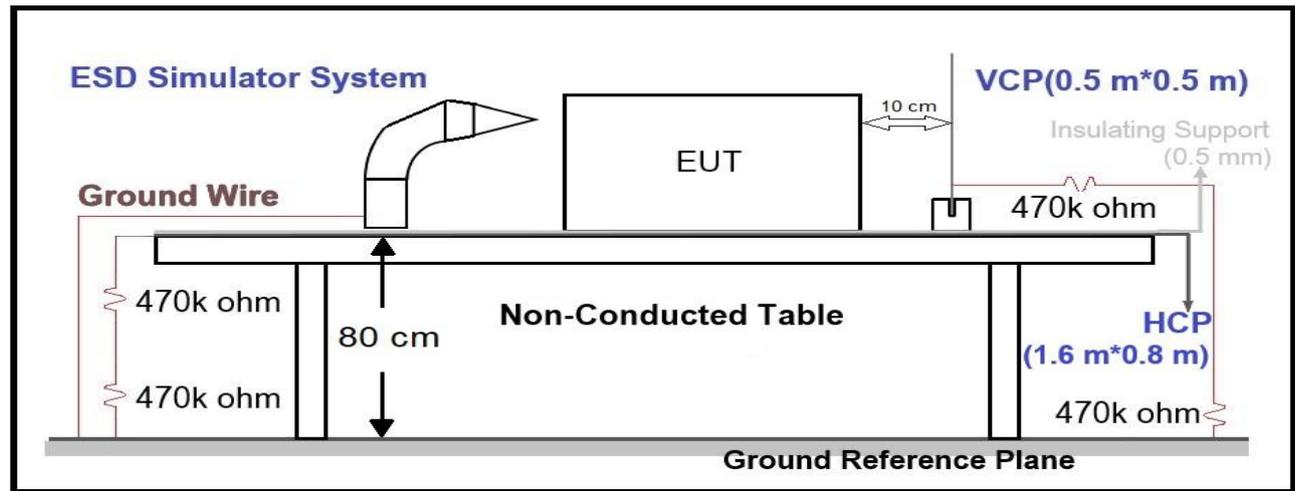

4.5.3 Test Procedure

The basic test procedure was in accordance with EN 61000-4-2:

IEC 61000-4-2 specifies that a tabletop EUT shall be placed on a non-conducting table which is 80 centimeters above a ground reference plane and that floor mounted equipment shall be placed on a insulating support approximately 10 centimeters above a ground plane. During the tests, the EUT is positioned over a ground reference plane in conformance with this requirement.

For tabletop equipment, a 1.6 by 0.8-meter metal sheet (HCP) is placed on the table and connected to the ground plane via a metal strap with two 470 k Ohms resistors in series. The EUT and attached cables are isolated from this metal sheet by 0.5-millimeter thick insulating material. A Vertical Coupling Plane (VCP) grounded on the ground plane through the same configuration as in the HCP is used.

Air Discharge:

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

Contact Discharge:

All the procedure shall be same as Section 8.3.1 of IEC 61000-4-2, except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

Indirect discharge for horizontal coupling plane

At least 50 single discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1 m from the EUT and with the discharge electrode touching the coupling plane.

Indirect discharge for vertical coupling plane

At least 50 single discharges shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m × 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

4.5.4 Test Results

Test Mode:		Mode 1										
Air Discharge												
Test Points	Test Levels							Verdict				
	± 2 kV	Performance Criterion		± 4 kV	Performance Criterion		± 8 kV	Performance Criterion		Pass	Fail	Observation
Gaps	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> A	<input type="checkbox"/> B	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> A	<input type="checkbox"/> B	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> A	<input type="checkbox"/> B	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Note 1
Contact Discharge												
Test Points	Test Levels						Verdict					
	± 2kV	Performance Criterion		± 4 kV	Performance Criterion		± 6 kV	Performance Criterion		Pass	Fail	Observation
Output port	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> A	<input type="checkbox"/> B	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> A	<input type="checkbox"/> B	<input type="checkbox"/>	<input type="checkbox"/> A	<input type="checkbox"/> B	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Note 1
Discharge To Horizontal Coupling Plane												
Side of EUT	Test Levels				Verdict							
	± 2 kV	± 4 kV	± 6 kV	± 8 kV	Pass	Fail	Performance Criterion		Observation			
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> A	<input type="checkbox"/> B	Note 1			
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> A	<input type="checkbox"/> B	Note 1			
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> A	<input type="checkbox"/> B	Note 1			
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> A	<input type="checkbox"/> B	Note 1			
Discharge To Vertical Coupling Plane												
Side of EUT	Test Levels				Verdict							
	± 2 kV	± 4 kV	± 6 kV	± 8 kV	Pass	Fail	Performance Criterion		Observation			
Front	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> A	<input type="checkbox"/> B	Note 1			
Back	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> A	<input type="checkbox"/> B	Note 1			
Left	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> A	<input type="checkbox"/> B	Note 1			
Right	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/> A	<input type="checkbox"/> B	Note 1			

Note1: Criterion A: There was no change compared with initial operation during the test.

Note2: Criterion B: The performance decreased during the experiment, but it can recover by itself after the experiment.

4.6. Radiated Electromagnetic Field (RS)

4.6.1 Test Specification


EN 61000-4-3			
Environmental Phenomena	Units	Test Specification	Performance Criterion
Enclosure Port			
Test Frequency Range	MHz	80-1000, 1800, 2600, 3500, 5000	A
RF Electromagnetic Field Amplitude Modulated	V/m (Un-modulated, rms)	3	
	% AM (1kHz)	80	

EUT tested in accordance with the specifications given by the Standard of EN 61000-4-3.

Sweeping time of radiated : 0.0015 decade/s

Dwell time : 1 Second

4.6.2 Test Configuration

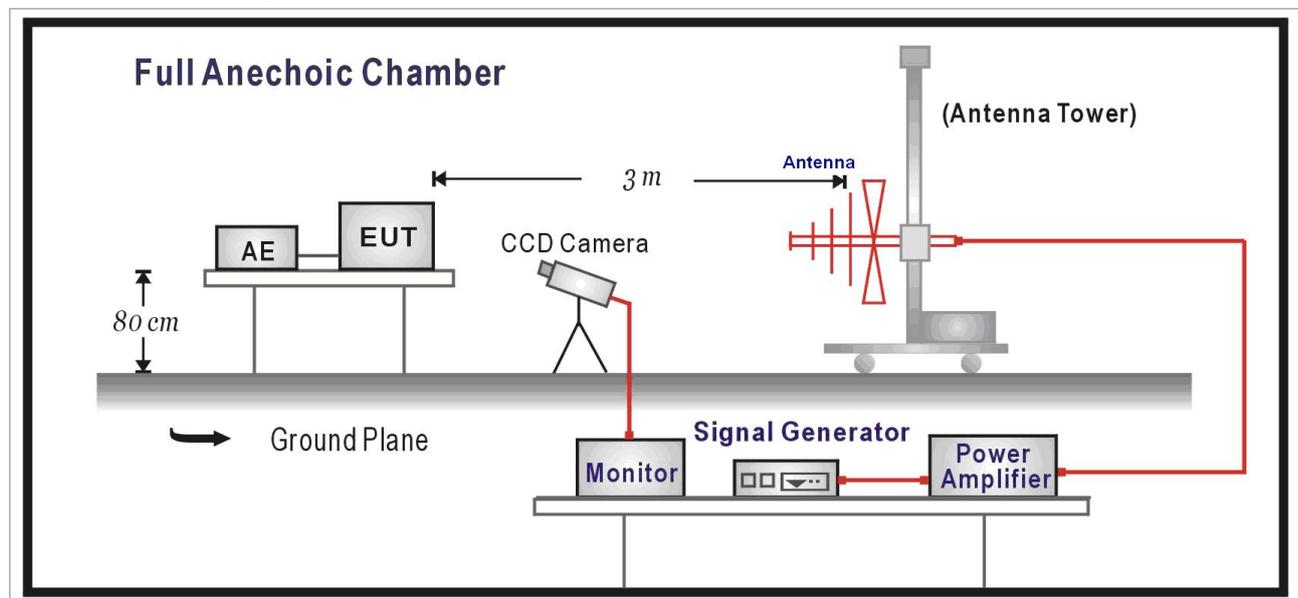

4.6.3 Test Procedure

The test procedure was in accordance with EN 61000-4-3

- The testing was performed in a fully anechoic chamber. The transmit antenna was located at a distance of 3 meters from the EUT.
- The frequency range is swept from 80 MHz to 1 GHz, with the signal 80% amplitude modulated with a 1kHz sine-wave. The rate of sweep did not exceed 1.5×10^{-3} decade/s, where the frequency range is swept incrementally, the step size was 1% of preceding frequency value.
- The dwell time at each frequency shall be not less than the time necessary for the EUT to be able to respond.
- The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

4.6.4 Test Results

Test Mode: Mode 1				
Frequency (MHz)	Polarity	Field Strength (V/m)	Performance Criterion	Verdict
80 ~ 1000	H	3	<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS
80 ~ 1000	V	3	<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS
1800	H	3	<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS
1800	V	3	<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS
2600	H	3	<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS
2600	V	3	<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS
3500	H	3	<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS
3500	V	3	<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS
5000	H	3	<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS
5000	V	3	<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS

Note 1: The testing performed is from lowest level up to the highest level as required by Standard, but only highest level is shown on the report.

Criterion A: Operate as intended during and after the test

Criterion B: Operate as intended after the test


Criterion C: Loss/Error of function

4.7. Electrical Fast Transient/Burst (EFT)

4.7.1 Test Specification

EN 61000-4-4				
Item	Environmental Phenomena	Units	Test Specification	Performance Criterion
I/O and communication ports				
	Fast Transients Common Mode	kV (Peak) Tr/Th ns Rep. Frequency kHz	+0.5 5/50 5	B
Input DC Power Ports				
	Fast Transients Common Mode	kV (Peak) Tr/Th ns Rep. Frequency kHz	+0.5 5/50 5	B
Input AC Power Ports				
	Fast Transients Common Mode	kV (Peak) Tr/Th ns Rep. Frequency kHz	+1 5/50 5	B

4.7.2 Test Configuration

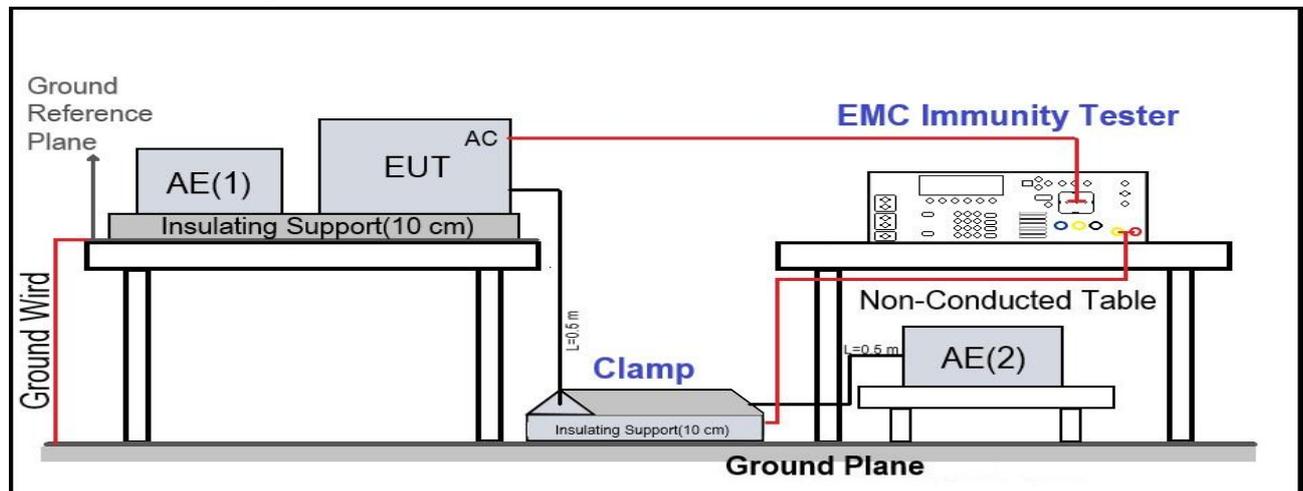

4.7.3 Test Procedure

- a) Both positive and negative polarity discharges were applied.
- b) The length of the “hot wire” from the coaxial output of the EFT generator to the terminals on the EUT should not exceed 1 meter.
- c) The duration time of each test sequential was 1 minute.
- d) The transient/burst waveform was in accordance with EN 61000-4-4, 5/50ns.

4.7.4 Test Results

Test Mode: Mode 1						
Test Point	Polarity	Test Level (kV)	Inject Time (Second)	Inject Method	Performance Criterion	Verdict
L	±	1	60	Direct	<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS
N	±	1	60	Direct	<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS
PE	±	1	60	Direct	<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS
L、N	±	1	60	Direct	<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS
L、PE	±	1	60	Direct	<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS
N、PE	±	1	60	Direct	<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS
L、N、PE	±	1	60	Direct	<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS
Signal Port	±	0.5	60	Coupling	<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS

Note 1: The testing performed is from lowest level up to the highest level as required by Standard, but only highest level is shown on the report.

Criterion A: Operate as intended during and after the test

Criterion B: Operate as intended after the test

Criterion C: Loss/Error of function


4.8. Surge

4.8.1 Test Specification

EN 61000-4-5				
Item	Environmental Phenomena	Units	Test Specification	Performance Criterion
Signal Ports and Telecommunication Ports				
Surges	Line to Ground	Tr/Th us kV	10/700 (5/320) ± 1 (Note)	B
Input DC Power Ports				
Surges	Line to Ground	Tr/Th us kV	1.2/50 (8/20) ± 0.5	B
Input AC Power Ports				
Surges	Line to Line Line to Ground	Tr/Th us kV kV	1.2/50 (8/20) ± 1 ± 2	B

Note: Where the coupling network for the 10/700 μs waveform affects the functioning of high speed data ports, the test shall be carried out using a 1,2/50 (8/20) μs waveform and appropriate coupling

4.8.2 Test Configuration

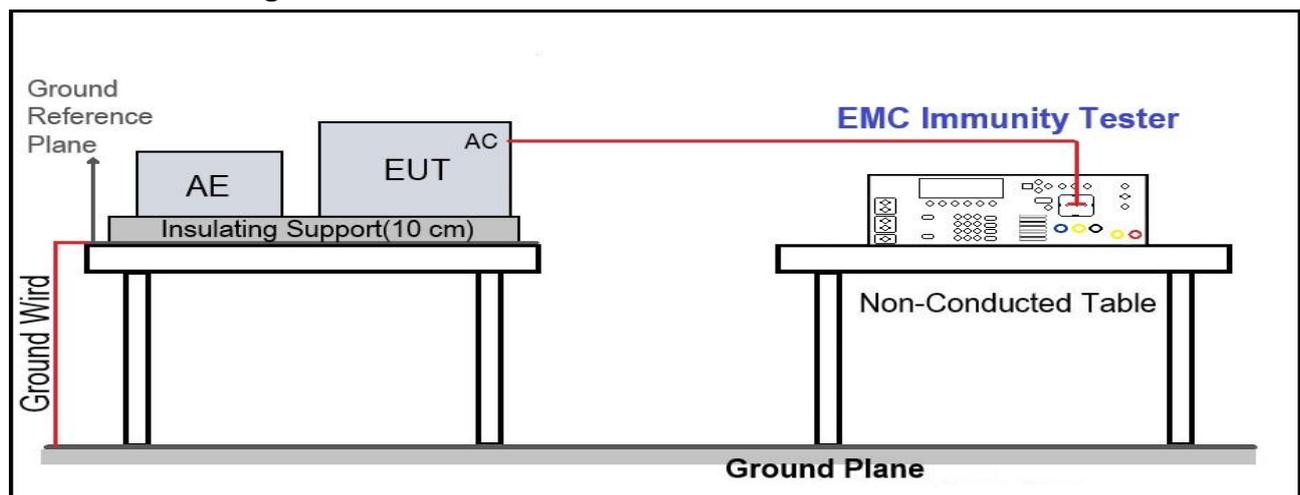

4.8.3 Test Procedure

- a) For EUT power supply:
The surge is applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines, and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.
- b) For test applied to unshielded un-symmetrically operated interconnection lines of EUT:
The surge was applied to the lines via the capacitive coupling. The coupling / decoupling networks didn't influence the specified functional conditions of the EUT. The interconnection line between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.
- c) For test applied to unshielded symmetrically operated interconnection / telecommunication lines of EUT:

The surge was applied to the lines via gas arrestors coupling. Test levels below the ignition point of the coupling arrestor were not specified. The interconnection line between the EUT and the coupling/decoupling networks was shorter than 2 meters in length.

4.8.4 Test Results

Test Mode:		Mode 1				
Angle:		90, 270				
Inject Line	Polarity	Voltage (kV)	Time Interval (Second)	Inject Method	Performance Criterion	Verdict
L-N	±	1	60	Direct	<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS
L-PE	±	2	60	Direct	<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS
N-PE	±	2	60	Direct	<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS
Signal Port	±	1	60	Direct	<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS

Note 1: The testing performed is from lowest level up to the highest level as required by Standard, but only highest level is shown on the report.

Criterion A: Operate as intended during and after the test

Criterion B: Operate as intended after the test

Criterion C: Loss/Error of function

4.9. Conducted Susceptibility (CS)

4.9.1 Test Specification

EN 61000-4-6					
Environmental Phenomena	Units	Test Specification			Performance Criterion
Signal Ports and Telecommunication Ports					
Radio-Frequency Continuous Conducted	MHz	0.15 to 10	10 to 30	30 to 80	A
	V (rms, Un-modulated)	3	3 to 1	1	
	% AM (1 kHz)	80			
Input DC Power Ports					
Radio-Frequency Continuous Conducted	MHz	0.15 to 10	10 to 30	30 to 80	A
	V (rms, Un-modulated)	3	3 to 1	1	
	% AM (1 kHz)	80			
Input AC Power Ports					
Radio-Frequency Continuous Conducted	MHz	0.15 to 10	10 to 30	30 to 80	A
	V (rms, Un-modulated)	3	3 to 1	1	
	% AM (1 kHz)	80			


EUT tested in accordance with the specifications given by the Standard of EN 61000-4-6.

Step : 1%


Step time : 3 Second

4.9.2 Test Configuration

CDN Method

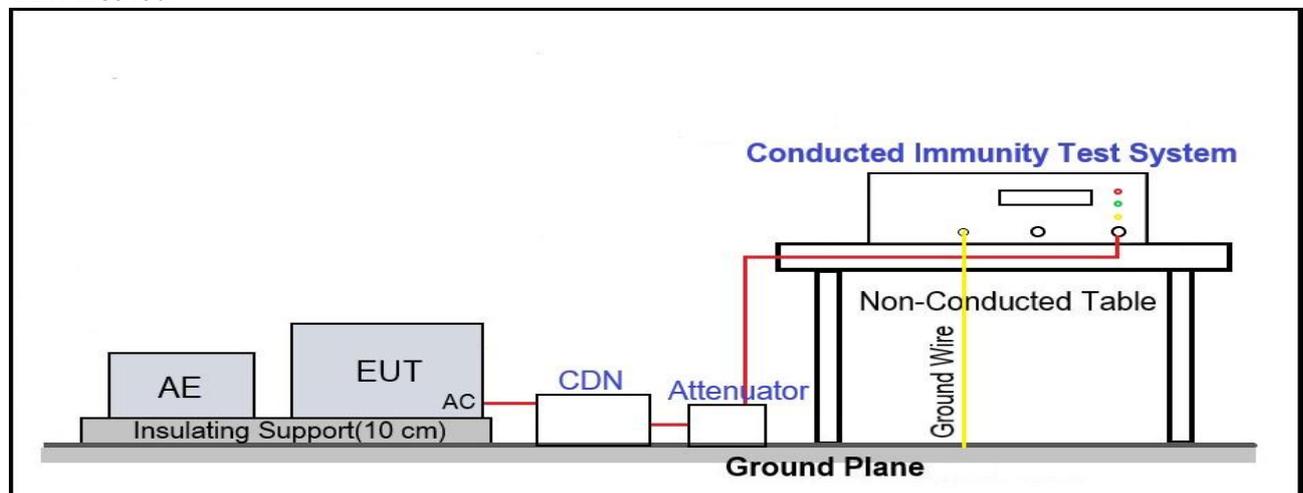

EM Clamp Method

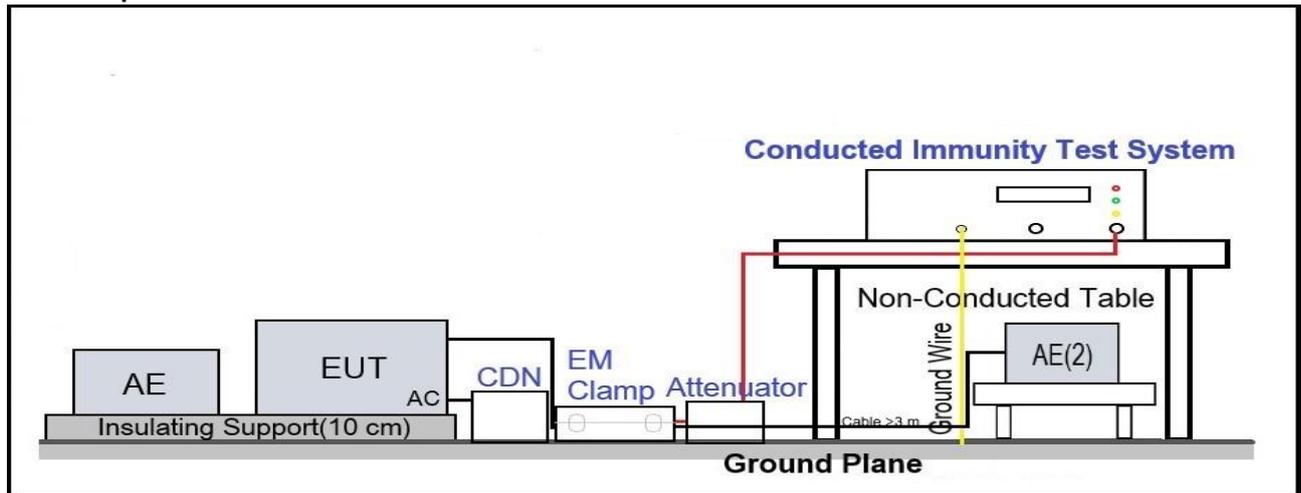

4.9.3 Test Procedure

The EUT shall be tested within its intended operating and climatic conditions.

The test shall be performed with the test generator connected to each of the coupling and decoupling devices in turn, while the other non-excited RF input ports of the coupling devices are terminated by a 50-ohm load resistor.

The frequency range was swept from 150 kHz to 80 MHz, using the signal level established during the setting process and with a disturbance signal of 80 % amplitude. The signal was modulated with a 1 kHz sine wave, pausing to adjust the RF signal level or the switch coupling devices as necessary. The sweep rate was 1.5×10^{-3} decades/s. Where the frequency range is swept incrementally, the step size was 1 % of preceding frequency value from 150 kHz to 80 MHz.

The dwell time at each frequency was less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies such as clock frequency and harmonics or frequencies of dominant interest, was analyzed separately.

Attempts were made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.

4.9.4 Test Results

Test Mode: Mode 1					
Frequency Band (MHz)	Field Strength (Vrms)	Inject Port	Inject Method	Performance Criterion	Verdict
0.15 ~ 10	3	AC Mains	Direct	<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS
10 ~ 30	3 to 1			<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS
30 ~ 80	1			<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS
0.15 ~ 10	3	Signal Port	Coupling	<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS
10 ~ 30	3 to 1			<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS
30 ~ 80	1			<input checked="" type="checkbox"/> A <input type="checkbox"/> B	PASS

Note 1: The testing performed is from lowest level up to the highest level as required by Standard, but only highest level is shown on the report.

Criterion A: Operate as intended during and after the test

Criterion B: Operate as intended after the test

Criterion C: Loss/Error of function

4.10. Power Frequency Magnetic Field (PMF)

4.10.1 Test Specification


EN 61000-4-8				
Item	Environmental Phenomena	Units	Test Specification	Performance Criterion
Enclosure Port				
	Power-Frequency Magnetic Field	Hz A/m (r.m.s.)	50/60 1	A

EUT tested in accordance with the specifications given by the standard of EN 61000-4-8.

Orientation : X, Y, Z

Test time : 180 Second

4.10.2 Test Configuration

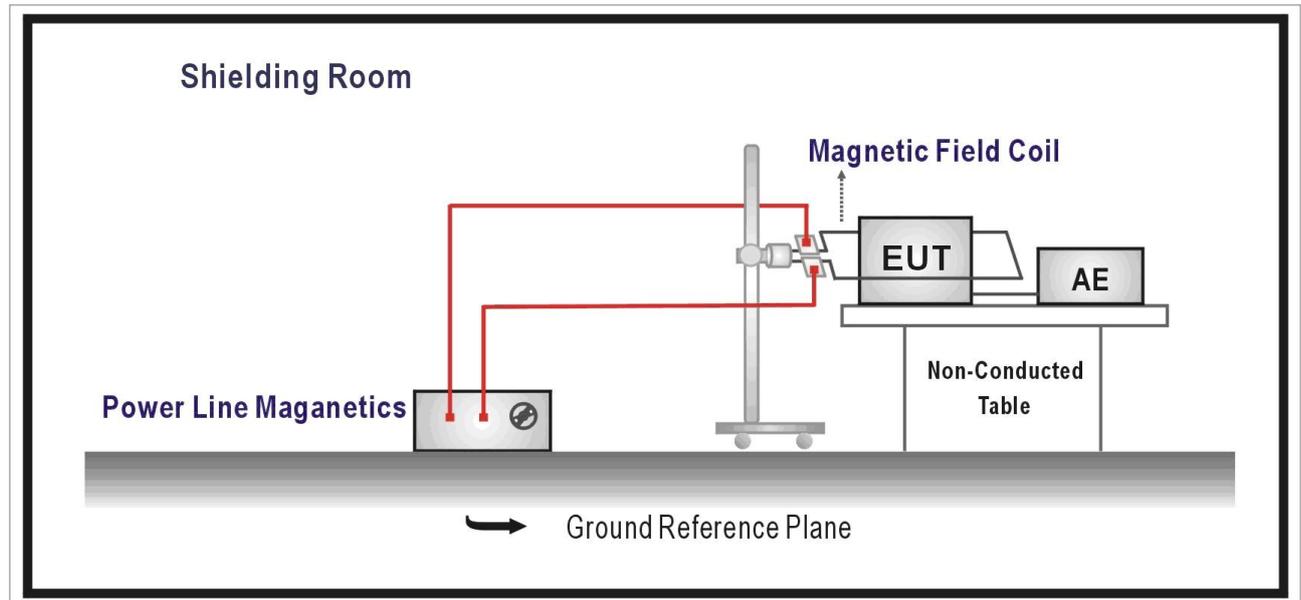

4.10.3 Test Procedure

The EUT and support equipment, are placed on a table that is 0.8 meter above a metal ground plane measured 1m*1m min. and 0.65mm thick min. The other condition as following manner:

- The equipment cabinets shall be connected to the safety earth directly on the GRP via the earth terminal of the EUT.
- The cables supplied or recommended by the equipment manufacturer shall be used. 1 meter of all cables used shall be exposed to the magnetic field.
- For the actual test configuration, please refer to the related Item –Block Diagram of system tested.

4.10.4 Test Results


N/A

4.11. Voltage Dips and Interruptions

4.11.1 Test Specification

EN 61000-4-11			
Environmental Phenomena	Units	Test Specification	Performance Criterion
Input AC Power Ports			
Voltage Dips	>95	% Reduction	B
	0.5	Period	
	30	% Reduction	C
	25	Period	
Voltage Interruptions	>95	% Reduction	C
	250	Period	

4.11.2 Test Configuration

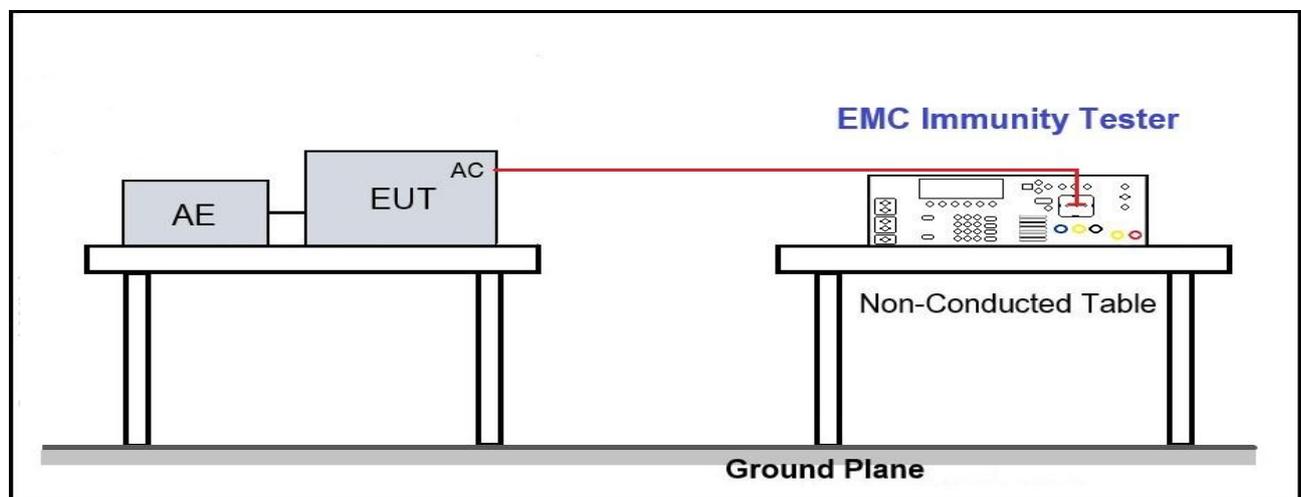

4.11.3 Test Procedure

The Section of EN 61000-4 defines the immunity test methods and range of preferred test levels for electrical and electronic equipment connected to low-voltage power supply networks for voltage dips, short interruptions and voltage variations. The Standard applies to electrical and electronic equipment having a rated input current not exceeding 16A per phase. It does not apply to electrical and electronic equipment for connection to D.C networks or 400Hz A.C networks. Test for these networks will be covered by future EN Standard. A performance criterion is classified as A, B, C, the recommendation is criterion A or B.

The test shall be performed with the EUT connected to the test generator with the shortest power supply cable as specified by EUT manufacturer. If no cable length is specified, it shall be the shortest possible length suitable to the application of the EUT.

The test set-up for the two types of phenomena described in this Standard are:

- Voltage dips and short interruptions;
- Voltage variations with gradual transition between the rated voltage and the changed voltage (Option)

Both tests may be implemented with this set-up. Test on the three-phase EUT are accomplished by using three set of equipment mutually synchronized.

The EUT shall be tested for each selected combination of test level and duration with a sequence of three Dip / interruption with intervals of 10 s minimum (between each test event). Each representative mode of operation shall be tested.

4.11.4 Test Results

Test Mode:		Mode 1		
Angle:		0, 45, 90, 135, 180, 225, 270, 315		
Test Voltage (Vac)	Voltage Reduction (%)	Test Duration (Periods)	Performance Criterion	Verdict
230	>95	0.5	<input type="checkbox"/> A <input checked="" type="checkbox"/> B <input type="checkbox"/> C	PASS
	30	25	<input type="checkbox"/> A <input type="checkbox"/> B <input checked="" type="checkbox"/> C	PASS
	>95	250	<input type="checkbox"/> A <input type="checkbox"/> B <input checked="" type="checkbox"/> C	PASS

Note 1: The testing performed is from lowest level up to the highest level as required by Standard, but only highest level is shown on the report.

Criterion A: Operate as intended during and after the test

Criterion B: Operate as intended after the test

Criterion C: Loss/Error of function

Note 2: The power is temporary off and can be reset by the operator.

5. TEST SETUP PHOTOS OF THE EUT


Conducted Emission (A.C. Mains Port)



Conducted Emission (Telecommunication Port)




Radiated Emission Below 1GHz

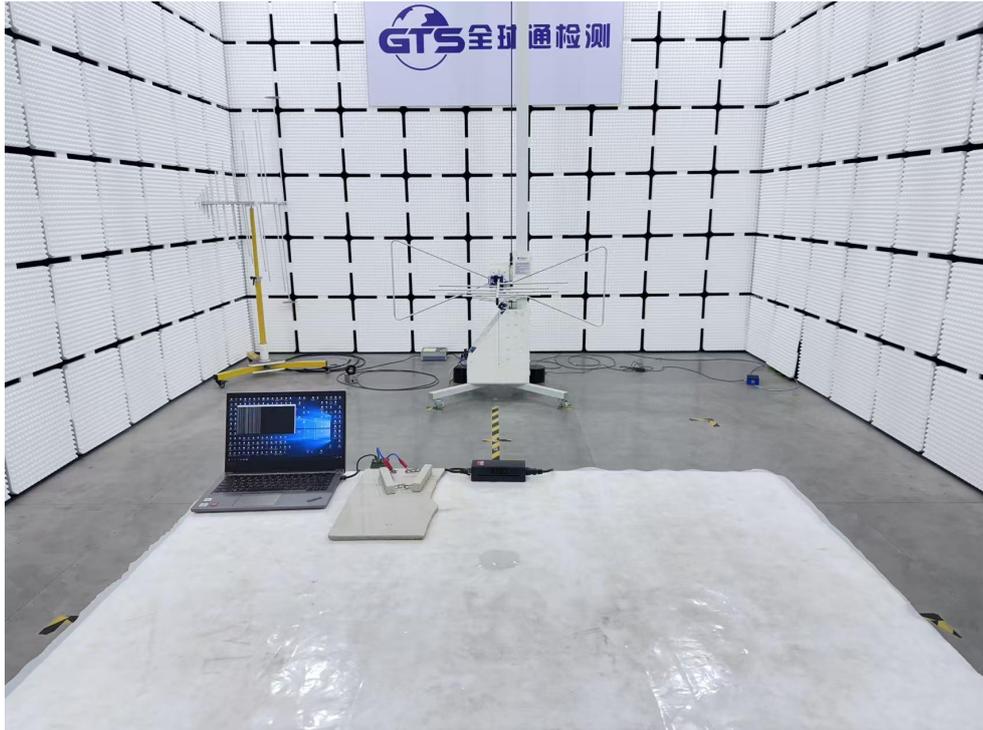

Voltage Fluctuations and Flicker



Radiated Electromagnetic Field

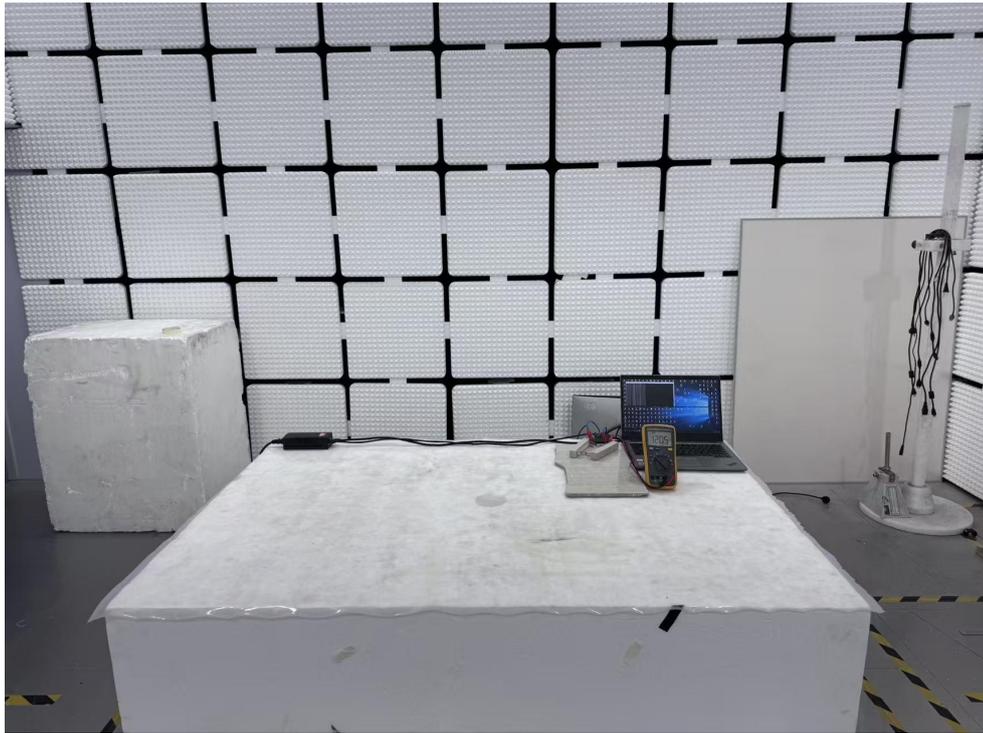

Electrical Fast Transient/Burst / Surge / Voltage Dips



Electrical Fast Transient/Burst (Signal Port)




Surge (Signal Port)



Conducted Susceptibility



Conducted Susceptibility (Signal Port)

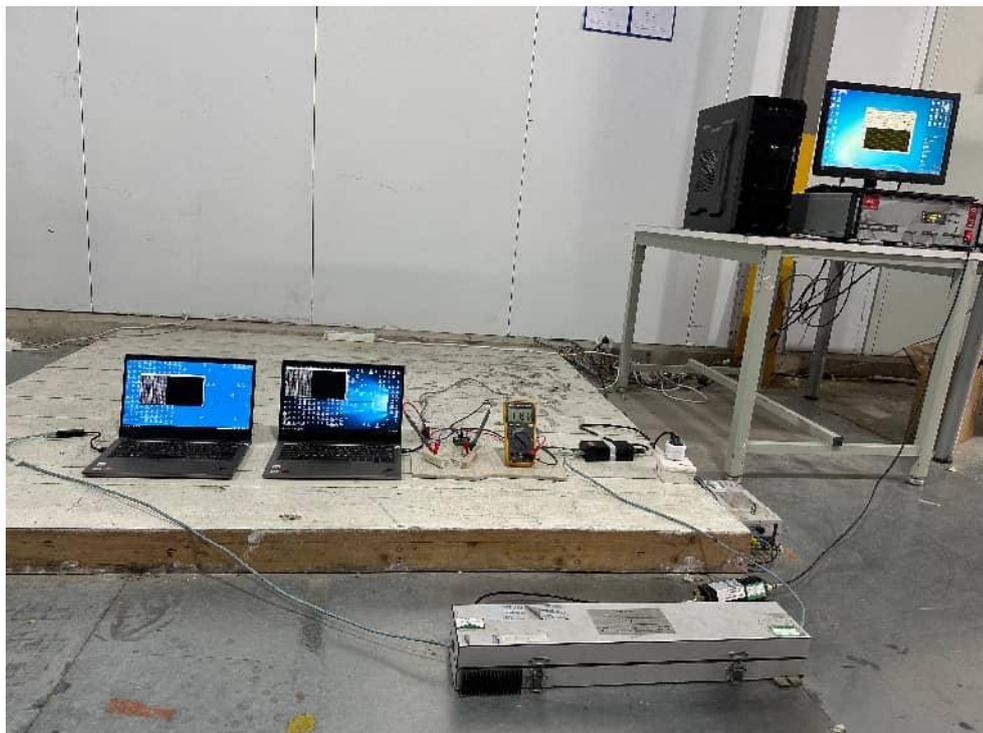

Electrostatic Discharge



6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

6.1.External photos of the EUT

Photo 1 External View



Photo 2 External View



Photo 3 External View



6.2. Internal photos of the EUT

Photo 1 Internal View

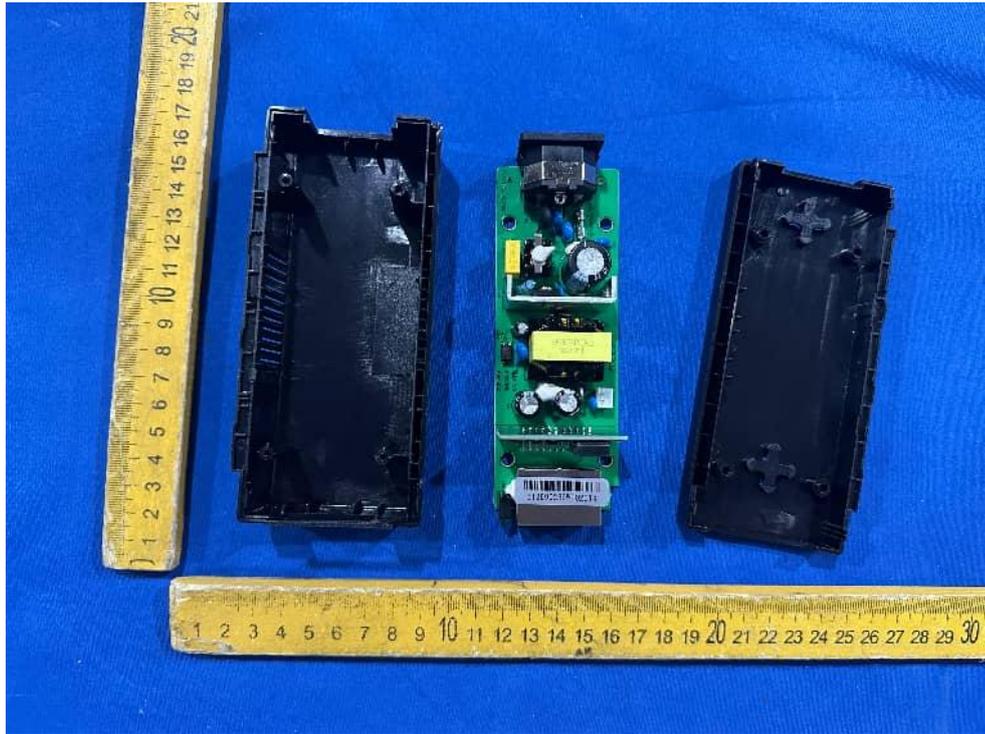


Photo 2 Internal View


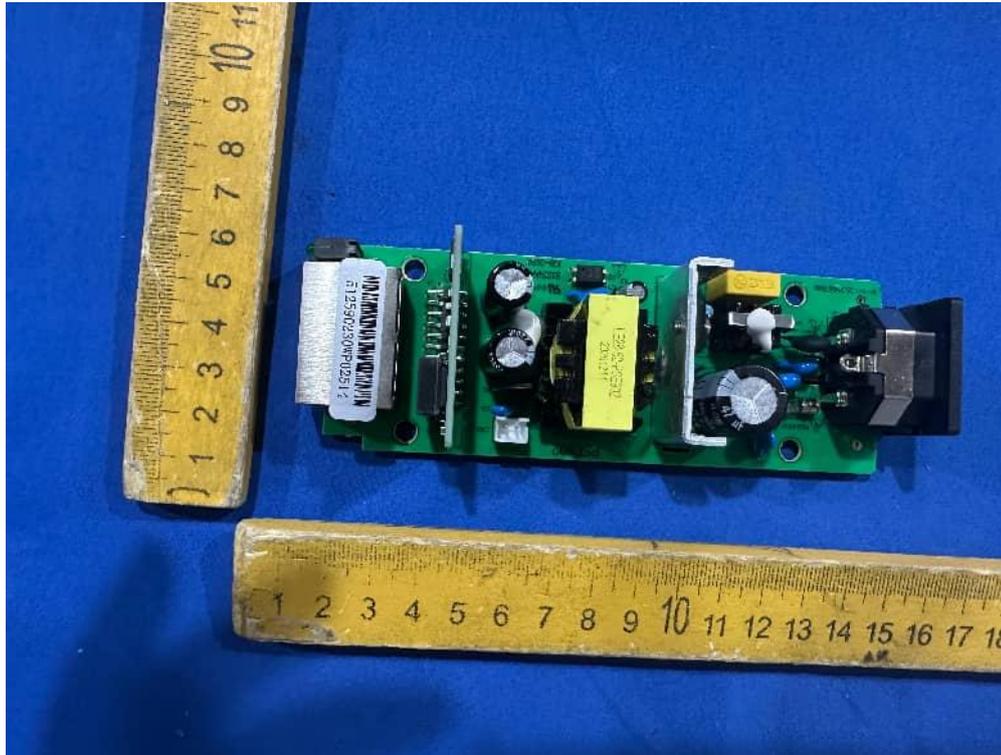


Photo 3 Internal View

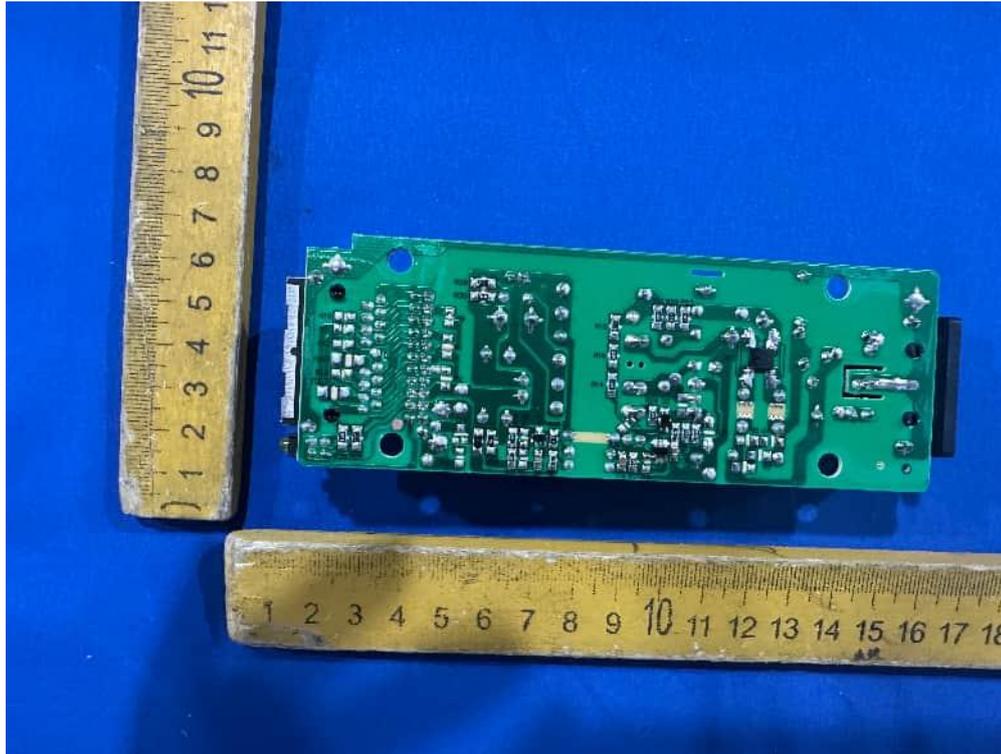

.....End of Report.....