



Shenzhen Global Test Service Co., Ltd
 No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road,
 Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

TEST REPORT FCC 47 CFR Part 15 Subpart B Radio Frequency Devices – Unintentional Radiators – Limits and methods of measurement ANSI C63.4: 2014 American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	
Report Reference No.....	GTS20260120005-1-02
Date of issue.....	Mar, 13, 2026
Testing Laboratory Name.....	Shenzhen Global Test Service Co.,Ltd.
Address.....	No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong
Supervised by (Testing Engineer).....	Duke Liu 
Reviewed by (Testing Engineer).....	Olive Nie 
Approved by (Manager).....	Jason Hu 
Applicant's name.....	SDAPO Communication Co., Ltd.
Address.....	5F, W2, Chengxin Building , Tian An Shen Chuang Valley Industrial Center, Fenggang Town, Dongguan City, Guangdong Province, China
Manufacturer's name.....	SDAPO Communication Co., Ltd.
Address.....	5F, W2, Chengxin Building , Tian An Shen Chuang Valley Industrial Center, Fenggang Town, Dongguan City, Guangdong Province, China
Test specification:	
Standard.....	47 CFR FCC Part 15 Subpart B/ANSI C63.4: 2014
Receiver Date.....	Mar. 04, 2026
Test Period.....	Mar. 04, 2026 ~Mar. 06, 2026
Test item description.....	POE injector
Trade Mark.....	SDAPO
Model/Type reference.....	PSE802G
Listed Models.....	PSE30,PSE801,PSE30G,PSE801G,PSE30TG,PSE30WG-B, PSE60G,PSE156G,PSE60G-BT,PSE90G,PSE60BT-10G, PSE60BT-2.5G,PSE90BT-10G,PSE90BT-2.5G,POE-4805L, PSE24-30TG,PSE60C,PSE30C,PSE90C
Ratings.....	Input:100-240V~50/60Hz Output:DC 48V-56V, 30W Max
Result.....	PASS
Shenzhen Global Test Service Co., Ltd. All rights reserved.	
This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	



TEST REPORT

Test Report No. : GTS20260120005-1-02	Mar, 13, 2026 Date of issue
--	--------------------------------

Equipment under Test : POE injector

Model /Type : PSE802G

Model List : PSE30,PSE801,PSE30G,PSE801G,PSE30TG,PSE30WG-B,
PSE60G,PSE156G,PSE60G-BT,PSE90G,PSE60BT-10G,
PSE60BT-2.5G,PSE90BT-10G,PSE90BT-2.5G,POE-4805L,
PSE24-30TG,PSE60C,PSE30C,PSE90C

Model different : All models are identical to each other except for model name.

Classification of equipment : Class B

Highest internal frequency : Below 108MHz

Applicant : **SDAPO Communication Co., Ltd.**

Address : 5F, W2, Chengxin Building , Tian An Shen Chuang Valley Industrial Center, Fenggang Town, Dongguan City, Guangdong Province, China

Manufacturer : **SDAPO Communication Co., Ltd.**

Address : 5F, W2, Chengxin Building , Tian An Shen Chuang Valley Industrial Center, Fenggang Town, Dongguan City, Guangdong Province, China

Test Result	Pass
--------------------	-------------

The above equipment has been tested by Shenzhen Global Test Service Co., Ltd., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Contents

1. TEST SUMMARY	4
2. EUT INFORMATION	5
2.1. I/O Port Description	5
2.1. EUT operation mode	5
2.2. EUT configuration	6
3. TEST ENVIRONMENT	7
3.1. Address of the test laboratory	7
3.2. Test Facility	7
3.3. Test Software	7
3.4. Statement of the measurement uncertainty	7
3.5. Test Site Environmental	7
3.6. Test Instruments	8
4. TEST CONDITIONS AND RESULTS	9
4.1. Conducted Emission	9
4.1.1. Limits	9
4.1.2 Test Configuration	9
4.1.3 Test Procedure	10
4.1.4 Test Results	10
4.2. Radiated Emission	13
4.2.1 Limit	13
4.2.2 Test Configuration	14
4.2.3 Test Procedure	15
4.2.4 Test Results	16
5. TEST SETUP PHOTOS OF THE EUT	19
6. PHOTOS OF THE EUT	20
6.1. External photos of the EUT	20
6.2. Internal photos of the EUT	22

1. TEST SUMMARY

Emission			
Standard	Item	Verdict	Remark
FCC 47 CFR PART 15 SUBPART B ANSI C63.4	Conducted Emission	PASS	Meet Class B limit
FCC 47 CFR PART 15 SUBPART B ANSI C63.4	Radiated Emission	PASS	Meet Class B limit

The test results of this report was related only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

2. EUT INFORMATION

2.1. I/O Port Description

I/O Port Types	Q'TY	Test Description
1). /	/	/


2.1. EUT operation mode

Pre-Test Mode	Mode 1: Data transmission+Full Load		
Final Test Mode	Conducted Emission		Mode 1
	Radiates Emission	Below 1GHz	Mode 1
		Above 1GHz	N/A, highest internal frequency below 108MHz

Then, the above highest emission mode of the configuration of the EUT and cable was chosen for all final test items.

2.2.EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

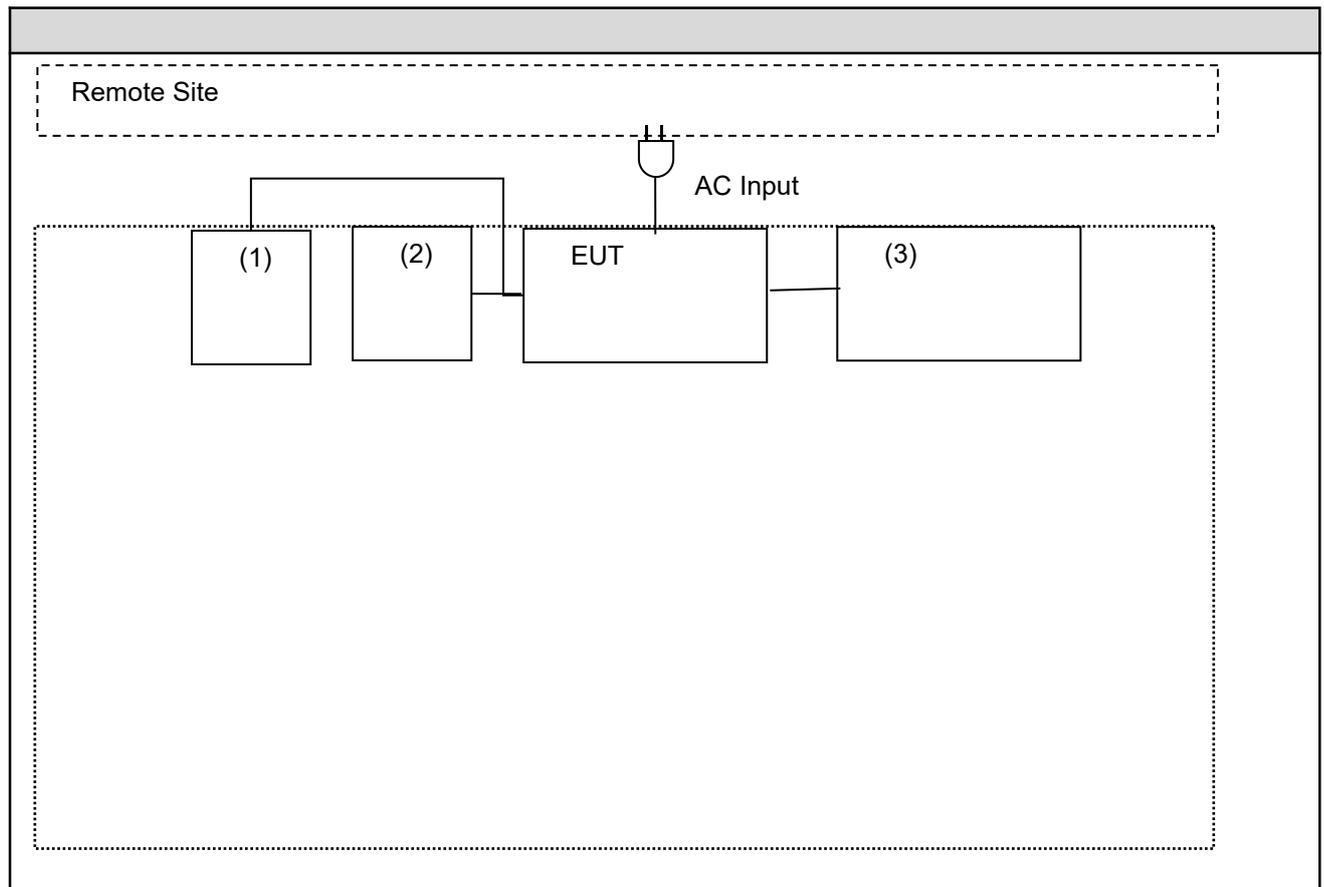

Auxiliary Equipment					
	Description	Manufacturer	Model Number	Otyr	Remarks
(1)	Laptop	Lenovo	/	/	Provided by the Laboratory
(1)	Cement load	/	/	/	Provided by the Laboratory
(1)	Laptop	Lenovo	/	/	Provided by the Laboratory

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Global Test Service Co., Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L8169)

Shenzhen Global Test Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA (Certificate No. 4758.01)

Shenzhen Global Test Service Co., Ltd. has been assessed by the American Association for Laboratory Accreditation (A2LA). Certificate No. 4758.01.

3.3. Test Software

Measurement Software			
No.	Description	Software	Version
1	Conducted Emission	JS32-RE	Ver 2.5
2	Radiated Emission _ Below 1GHz	JS32-RE	Ver 2.5.1.8
3	Radiated Emission _ Above 1GHz	JS32-RE	Ver 2.5.1.8

3.4. Statement of the measurement uncertainty

Test Item	Test Site	Frequency Range	Uncertainty (dB)	
Conducted Emission AC Power Port	Conductive Shielding Room	9 kHz ~ 150 kHz	1.6	
		150 kHz ~ 30 MHz	1.6	
Radiated Emission	966	30 MHz ~ 1000 MHz	Horizontal	3.95
			Vertical	3.95
		1000 MHz ~ 40000 MHz	4.57	

Note: The Vertical and Horizontal measurement uncertainty of 1GHz to 6GHz is evaluated and choose which polarity is worst value.

3.5. Test Site Environmental

Test Item	Required (IEC 60068-1)		Actual
Conducted Emission	Temperature (°C)	15-35	24.3
	Humidity (%RH)	25-75	52
	Barometric pressure (mbar)	860-1060	1001
Radiated Emission	Temperature (°C)	15-35	23.5
	Humidity (%RH)	25-75	51
	Barometric pressure (mbar)	860-1060	1001

3.6. Test Instruments

Conducted Emission test site					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Test Receiver	R&S	ESPI 3	101841	2025/06/26	1 year
Transient Limiter	CYBERTEK	EM5010A	E1950100106	2025/06/27	1 year
LISN	R&S	ESH2-Z5	893606/008	2025/06/27	1 year
LISN	CYBERTEK	EM5040A	E1850400105	2025/06/27	1 year
ISN	SCHWARZBECK	NTFM 8158	066	2025/06/27	1 year
ISN	SCHWARZBECK	CAT5 8158	121	2025/06/27	1 year
ISN	SCHWARZBECK	CAT3 8158	102	2025/06/27	1 year
Test Site	XINJU	Conductive Shielding Room	N/A	N.C.R.	-----

966 Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Amplifier	SKET	LAPA 30M01G	SK20240104001	2025/12/23	1 year
Amplifier	EMCI	EMC012645SE	980340	2025/12/23	1 year
Test Receiver	R&S	ESCI 7	101102	2025/06/26	1 year
Spectrum Analyzer	R&S	FSV40-N	101800	2025/06/21	1 year
Broadband Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB 9163	00976	2025/07/15	1 year
Double Ridged Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	01622	2025/12/01	1 year
Test Site	XINJU	966	N/A	2025/06/29	3 year

4. TEST CONDITIONS AND RESULTS

4.1. Conducted Emission



4.1.1. Limits

Frequency (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Note: (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases in line with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

4.1.2 Test Configuration

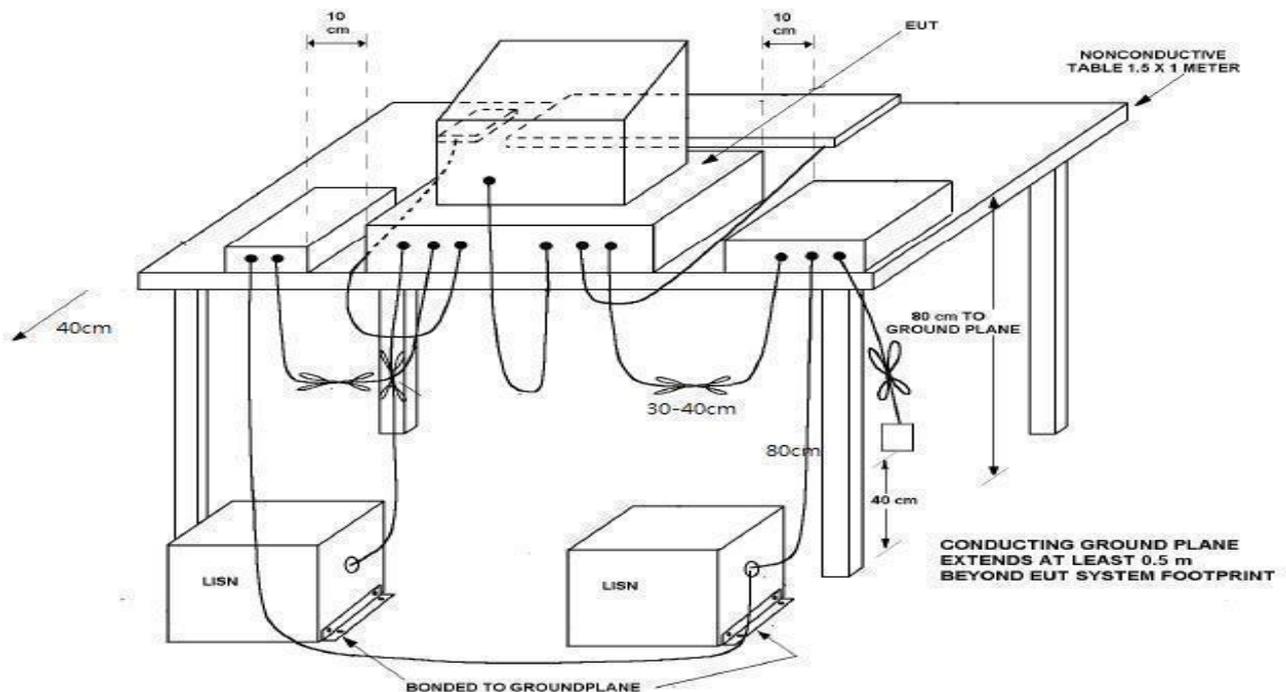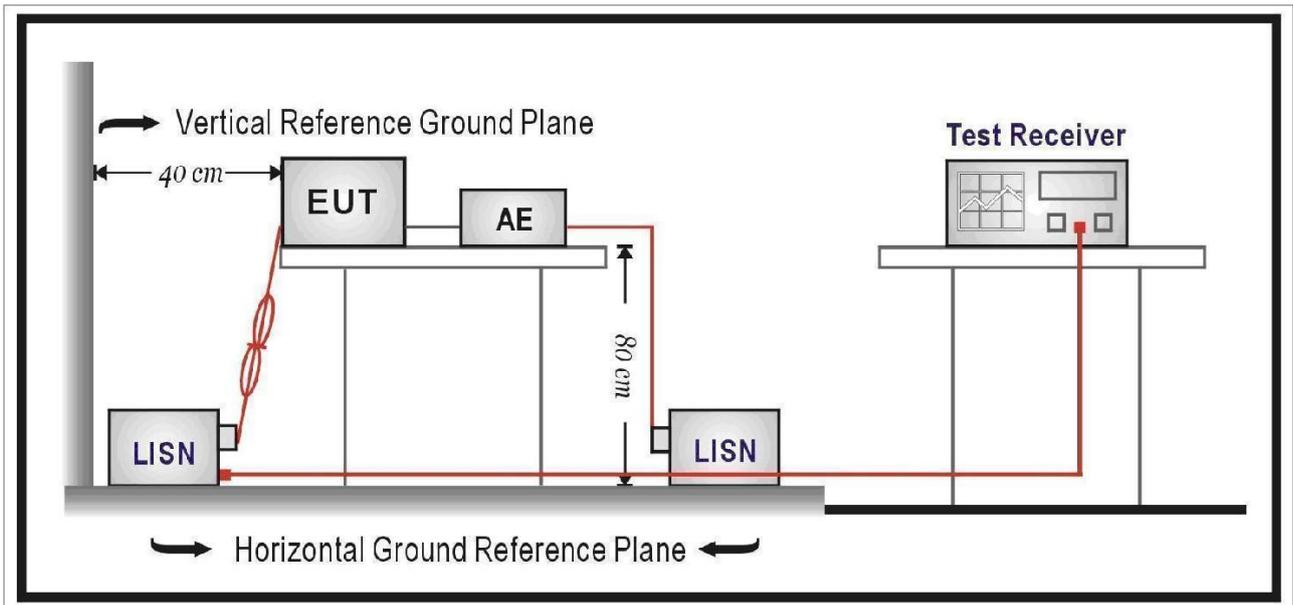

4.1.3 Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 Ω // 50 μ H coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50 Ω // 50 μ H coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.


The AMN shall be placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0,8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the center of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All 50 Ω ports of the LISN shall be resistively terminated into 50 Ω loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

4.1.4 Test Results

Test Standard:	FCC Part 15B	Power Line:	L1
Test Mode:	Mode 1	Test Power:	AC 120 V/60 Hz
Description:			

Test Graph

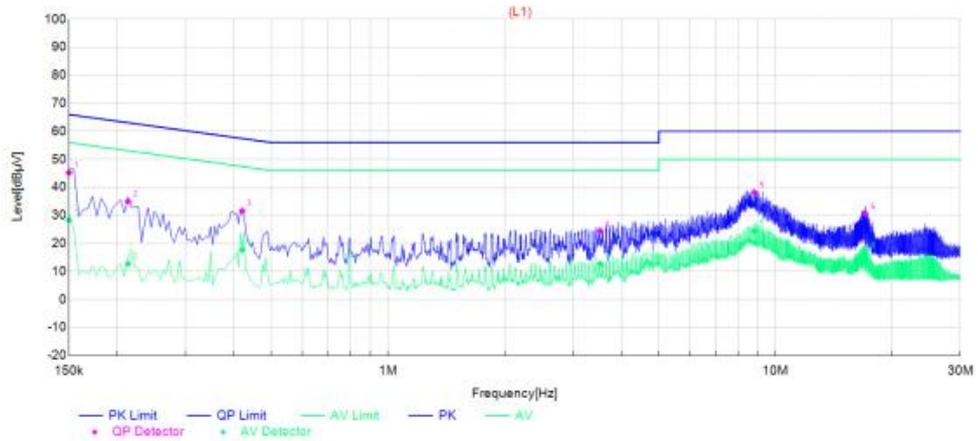


Final Data List

NO.	Frequency [MHz]	QP Reading [dBuV]	AVG. Reading [dBuV]	Factor [dB]	QP Result [dBuV]	AVG. Result [dBuV]	QP Limit [dBuV]	AVG. Limit [dBuV]	QP Margin [dB]	AVG. Margin [dB]	Line	Remark
1	0.15	34.90	17.93	10.35	45.25	28.28	66.00	56.00	20.75	27.72	L1	PASS
2	0.213	24.87	2.58	10.14	35.01	12.72	63.09	53.09	28.08	40.37	L1	PASS
3	0.42	21.44	7.57	10.18	31.62	17.75	57.45	47.45	25.83	29.70	L1	PASS
4	3.5295	14.05	2.39	10.36	24.41	12.75	56.00	46.00	31.59	33.25	L1	PASS
5	8.808	27.63	13.87	10.55	38.18	24.42	60.00	50.00	21.82	25.58	L1	PASS
6	17.079	19.28	5.29	11.23	30.51	16.52	60.00	50.00	29.49	33.48	L1	PASS

Note: 1. Result (dBuV) = Reading (dBuV) + Factor (dB).
 2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

Test Standard: FCC Part 15B Power Line: N
 Test Mode: Mode 1 Test Power: AC 120 V/60 Hz
 Description:

Test Graph

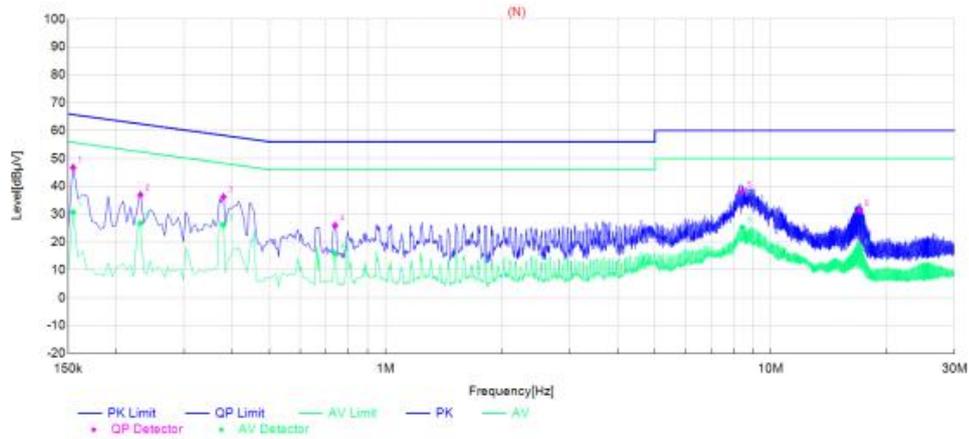

Final Data List												
NO.	Frequency [MHz]	QP Reading [dBµV]	AVG. Reading [dBµV]	Factor [dB]	QP Result [dBµV]	AVG. Result [dBµV]	QP Limit [dBµV]	AVG. Limit [dBµV]	QP Margin [dB]	AVG. Margin [dB]	Line	Remark
1	0.1545	36.41	20.39	10.33	46.74	30.72	65.75	55.75	19.01	25.03	N	PASS
2	0.231	26.81	16.61	10.13	36.94	26.74	62.41	52.41	25.47	25.67	N	PASS
3	0.3795	26.06	15.93	10.15	36.21	26.08	58.29	48.29	22.08	22.21	N	PASS
4	0.7395	15.73	5.58	10.23	25.96	15.81	56.00	46.00	30.04	30.19	N	PASS
5	8.43	27.37	14.74	10.56	37.93	25.30	60.00	50.00	22.07	24.70	N	PASS
6	17.0205	20.07	6.08	11.18	31.25	17.26	60.00	50.00	28.75	32.74	N	PASS

Note: 1. Result (dBµV) = Reading (dBµV) + Factor (dB).
 2. Factor (dB) = Cable loss (dB) + LISN Factor (dB).

4.2. Radiated Emission

4.2.1 Limit

■ Below 1 GHz test shall not exceed following value

FCC 47 CFR PART 15 SUBPART B				
Frequency range (MHz)	Class A		Class B	
	Distance (m)	dBuV/m	Distance (m)	dBuV/m
30 to 88	10	39	3	40
88 to 216	10	43.5	3	43.5
216 to 960	10	46.4	3	46
Above 960	10	49.5	3	54

■ Above 1 GHz test shall not exceed following value

Frequency (MHz)	dBuV/m (Distance 3m)			
	Class A		Class B	
	Average	Peak	Average	Peak
1000 ~ 40000	60	80	54	74

Remark:1. The tighter limit shall apply at the edge between two frequency bands.


2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
3. RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)
4. Peak detector limit is corresponding to 20 dB above the maximum permitted average limit.

According to FCC Part 15.33 (b), for an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:


Highest frequency generated or used in the device or in which the device operated or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.75	30
1.75-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

4.2.2 Test Configuration


■ Below 1GHz

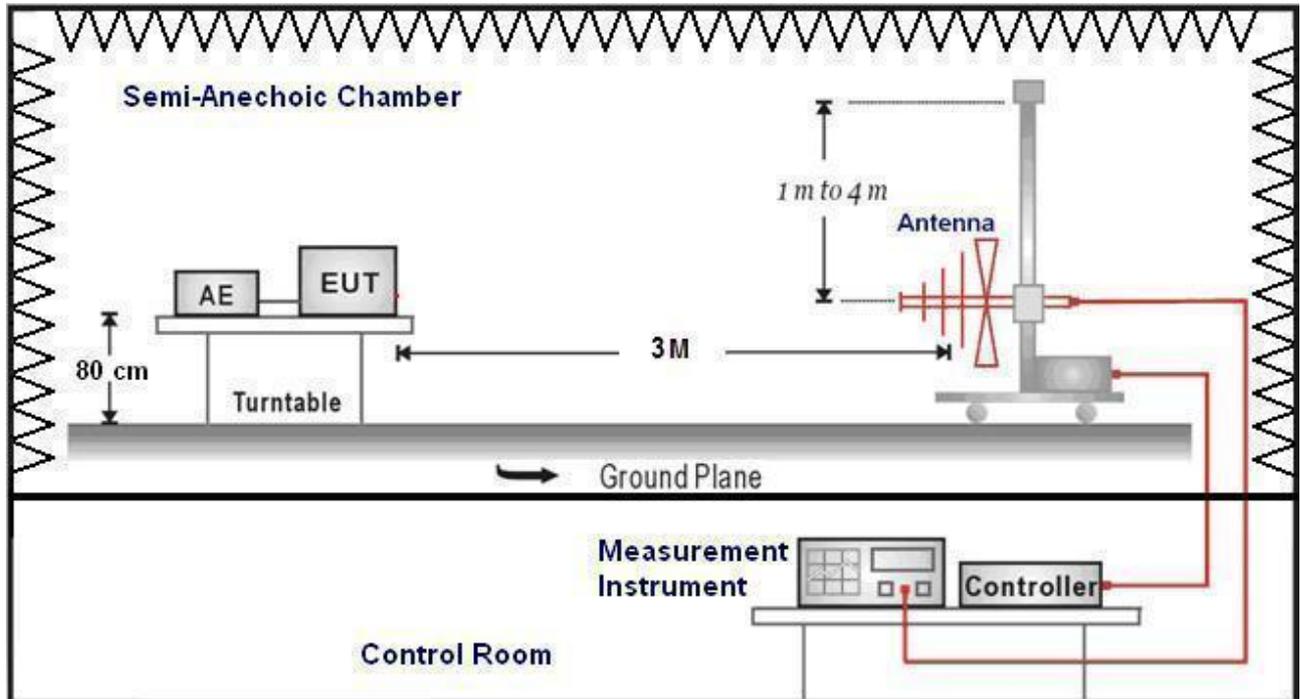

■ Above 1GHz

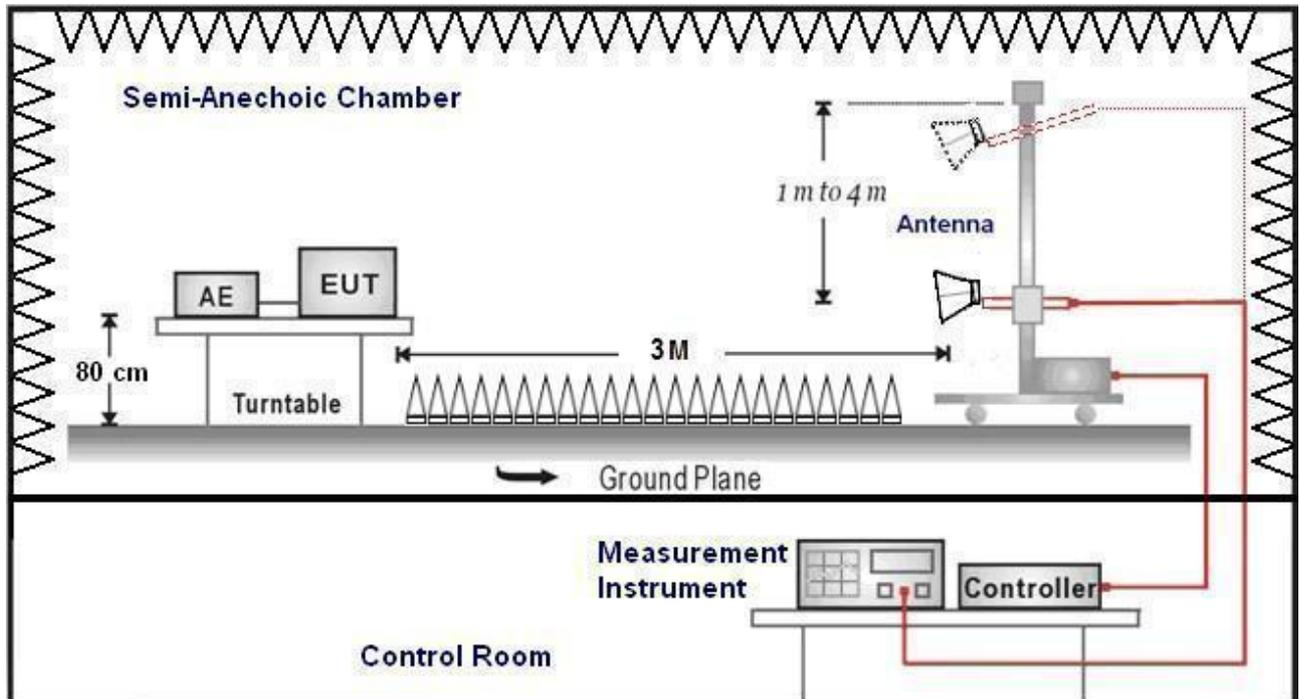

Test arrangement for radiated emissions of tabletop equipment.

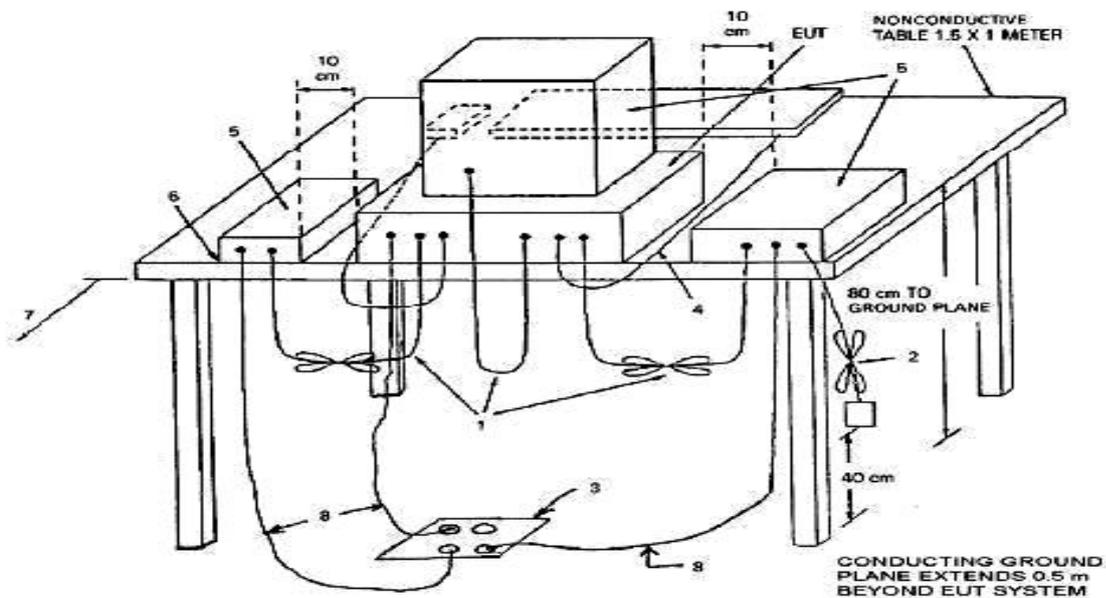

4.2.3 Test Procedure

■ Below 1 GHz

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. When the EUT is floor-standing equipment, it is placed on the ground plane which has a 12 mm non-conductive covering to insulate the EUT from the ground plane.

The turn table is 0.8 m height and 2.0 m wide x 1.0 m deep size. It can rotate 360 degrees to determine the position of the maximum emission level. The spacing between the each equipment was 10 cm. The mains cables are dropped to floor and are round to receptacle. Interconnecting cables of table top equipment that hang closer than 0.4 m to the ground plane are folded back and forth forming a bundle 0.3 m to 0.4 m long, hanging approximately in the middle between ground plane and table. The EUT was positioned such that the distance from antenna to the EUT was 10 meters and the receive antenna was moved from 1m to 4m to investigate maximum highest emission at least 6 points over the frequency range from 30 MHz to 1 GHz using a resolution bandwidth of 120 kHz and measured by the quasi-peak detector.

According to this standard paragraph 15.109, as an alternative to the radiated emission limits, digital devices may be shown to comply with the standards contained in Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, "Information Technology Equipment - Radio Disturbance Characteristics - Limits and Methods of Measurement".

■ Above 1 GHz

The Setup is same as Below 1 GHz placement. The turn table is 0.8 m height and 1.8 m wide x 1.0 m deep size.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meter for above 1 GHz, the highest frequency performed according to internal source frequency of the EUT, the specification was below:

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

Absorber shall be spread between floor of a turn table and a receive antenna shown in 4.2.3. The antenna used boresight antenna master from 1 meter and 4 meters to find out the maximum emission level and find the highest emission at least 6 points. Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated on radiated measurement.


Radiated emissions were applied to above 1 GHz using a resolution bandwidth of 1 MHz and measured by the peak and average detector which antenna to the EUT distance was 3 meters. If the EUT was meet both limits and measurement with the average detector receiver is unnecessary.

4.2.4 Test Results

Below 1GHz

Test Standard:	FCC Part 15B	Test Distance:	3 m
Test Mode:	Mode 1	Test Power:	AC 120 V/60 Hz
Measurement Range:	30 MHz~1 GHz	Ant.Polar.:	Horizontal
Description:			

Test Graph

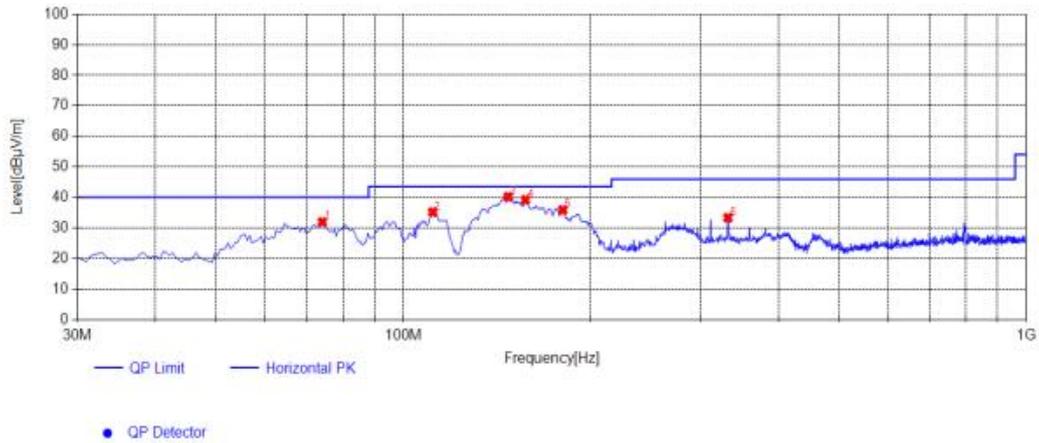


Suspected List											
NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	74.135	46.03	-14.11	31.92	40.00	8.08	100	7	PK	Horizontal	PASS
2	111.48	46.90	-11.75	35.15	43.50	8.35	100	349	PK	Horizontal	PASS
3	147.37	54.42	-14.23	40.19	43.50	3.31	100	357	PK	Horizontal	PASS
4	157.07	52.64	-13.45	39.19	43.50	4.31	100	3	PK	Horizontal	PASS
5	180.35	48.02	-12.17	35.85	43.50	7.65	100	15	PK	Horizontal	PASS
6	332.155	39.93	-6.60	33.33	46.00	12.67	100	258	PK	Horizontal	PASS

Note:1. Result (dBuV/m) = Reading(dBuV/m) + Factor (dB) .

2. Factor (dB) = Antenna Factor (dB/m) + Cable loss (dB) - Pre Amplifier gain (dB).

Test Standard:	FCC Part 15B	Test Distance:	3 m
Test Mode:	Mode 1	Test Power:	AC 120 V/60 Hz
Measurement Range:	30 MHz~1 GHz	Ant.Polar.:	Vertical
Description:			

Test Graph

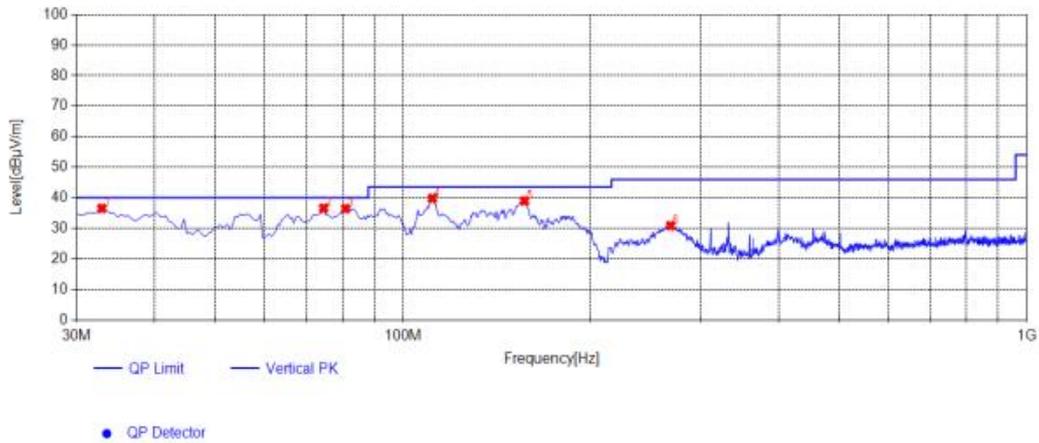

Suspected List

NO.	Frequency [MHz]	Reading [dBuV/m]	Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Polarity	Remark
1	32.91	49.14	-12.62	36.52	40.00	3.48	100	100	PK	Vertical	PASS
2	74.62	50.70	-14.14	36.56	40.00	3.44	100	345	PK	Vertical	PASS
3	80.925	50.73	-14.29	36.44	40.00	3.56	100	0	PK	Vertical	PASS
4	111.48	51.53	-11.75	39.78	43.50	3.72	100	21	PK	Vertical	PASS
5	156.585	52.45	-13.50	38.95	43.50	4.55	100	17	PK	Vertical	PASS
6	268.62	38.76	-7.93	30.83	46.00	15.17	100	337	PK	Vertical	PASS

Note: 1. $\text{Result (dBuV/m)} = \text{Reading (dBuV/m)} + \text{Factor (dB)}$


2. $\text{Factor (dB)} = \text{Antenna Factor (dB/m)} + \text{Cable loss (dB)} - \text{Pre Amplifier gain (dB)}$

5. TEST SETUP PHOTOS OF THE EUT

Conducted Emission



Radiated Emission Below 1GHz

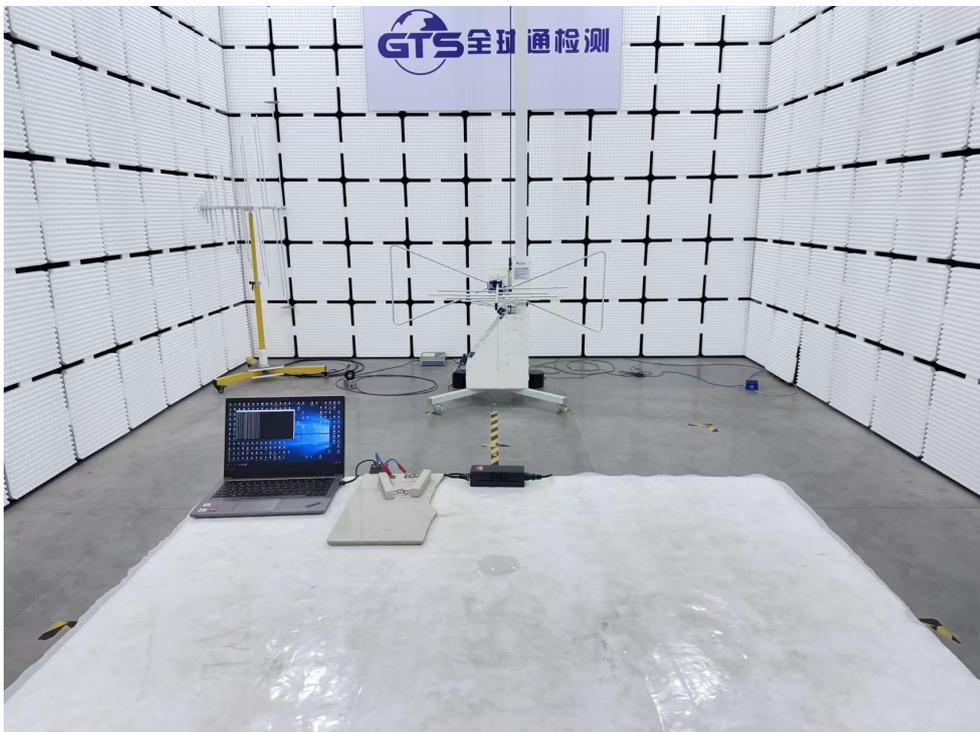

6. PHOTOS OF THE EUT

6.1. External photos of the EUT

Photo 1 External View



Photo 2 External View

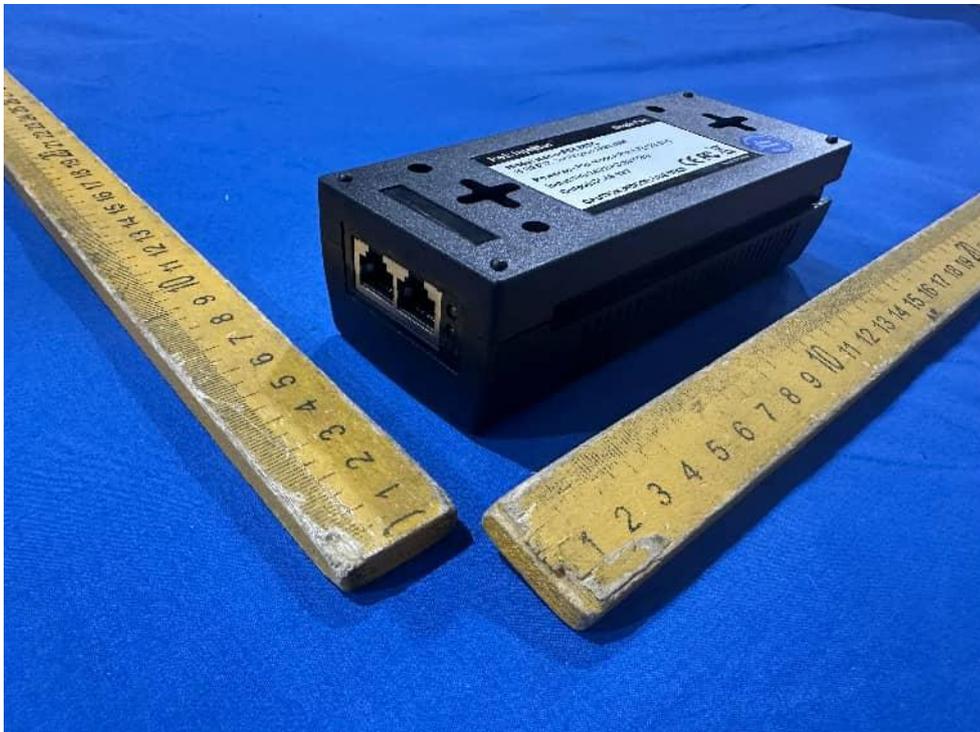


Photo 3 External View



6.2. Internal photos of the EUT

Photo 1 Internal View

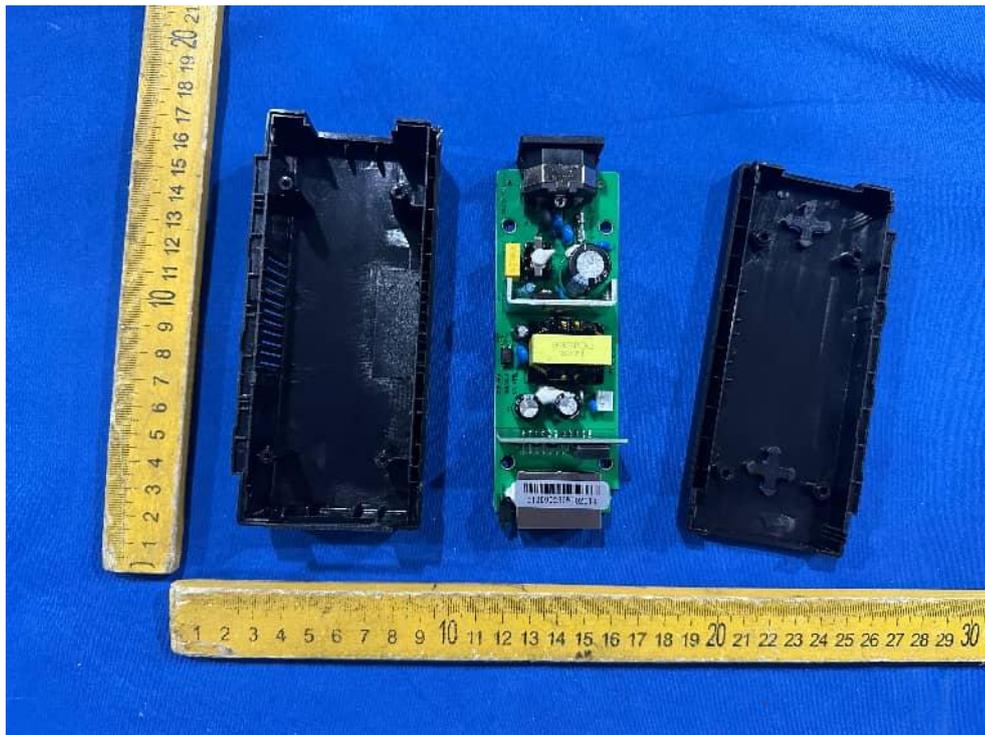


Photo 2 Internal View


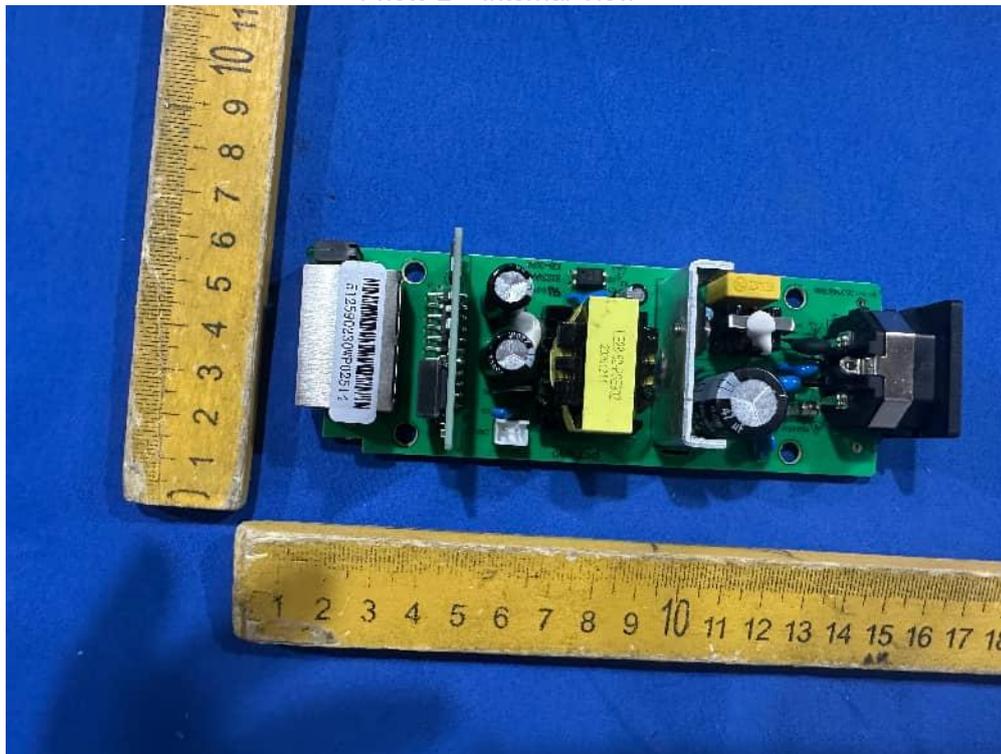


Photo 3 Internal View

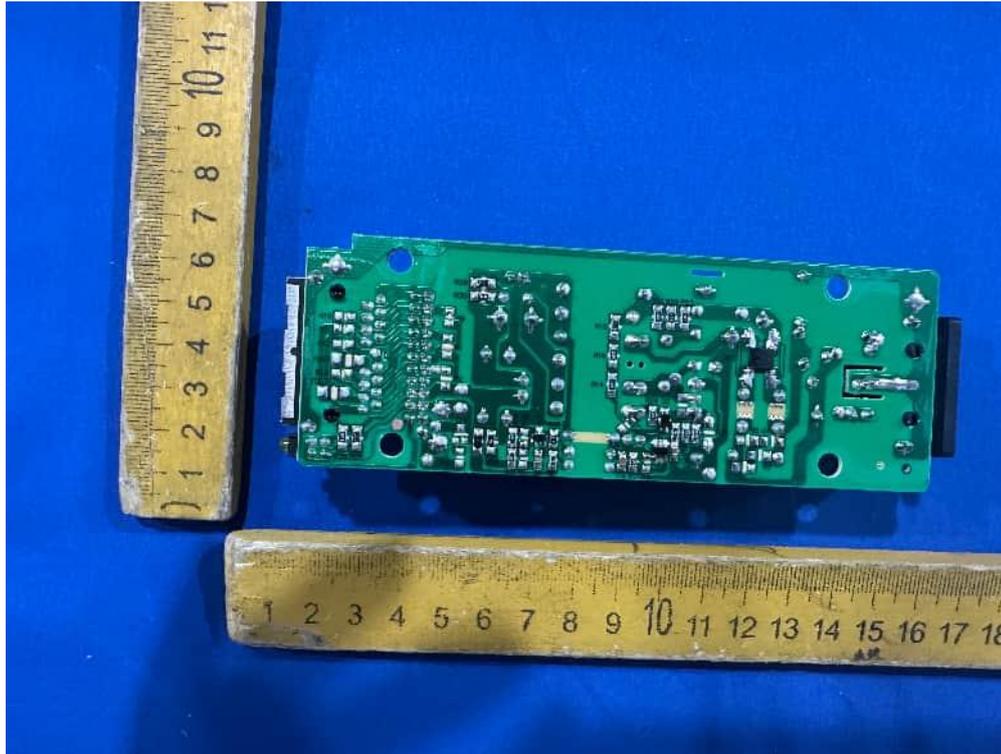

.....End of Report.....